




2020 GL

High output ground light for architectural applications

Vandal resistant (Maximum load at 30mph of 1840kg)

High quality build for fit-and-forget installations



LIAQA AWARD
WINNER 2017



Lighting for
a Living

2020 GL

HIGH OUTPUT EXTERIOR ACCENT GROUND LIGHT

5 YR

IP67



4000K

FEATURES

- > High output ground light for architectural applications
- > High quality build for fit-and-forget installations
- > Vandal resistant (Maximum load at 30mph of 1840kg)
- > Supplied with 24° reflector
- > CRI: Ra>80
- > Up to 56 lumens per Watt efficacy
- > 30,000 hours lifetime (L70/B50)

CONSTRUCTION


- > Die-cast aluminium body finished in silver (RAL 9005)
- > Stainless steel trim (SUS 316L)
- > PVC mounting sleeve
- > Integral driver
- > Supplied with 0.5m H05RN 3-core, 1.0mm² cables and PG-9 PVC cable gland
- > Symmetric beam as standard
- > Supplied as standard with neutral white (4000K)

TO SPECIFY ORDER

LED ground light as per TamLite 2020 GL range

INSTALLATION NOTES

Recessed into PVC mounting sleeve, fixed with stainless steel screws

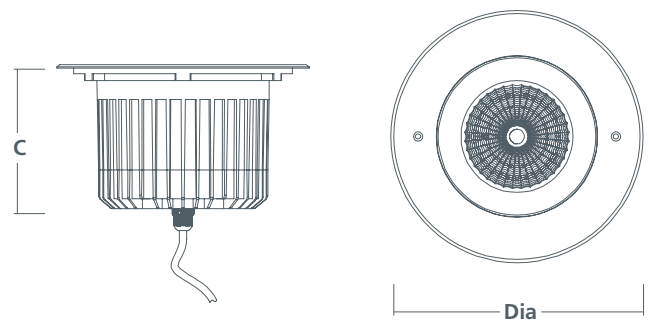

HIGH OUTPUT EXTERIOR ACCENT GROUND LIGHT

Order Code	Description	lm	W	lm/W	C (mm)	Dia. (mm)	Cut-Out (mm)	kg
TA2020GL13NW	13W - 4000K	600	13	46	142	173	163 x 220	2.60
TA2020GL19NW	19W - 4000K	1000	19	53	158	210	179 x 220	3.00
TA2020GL32NW	32W - 4000K	1800	32	56	176	250	222 x 220	7.40



IDEAL FOR HOTELS, RESTAURANTS
AND RECEPTION AREAS



Contact Us

Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. +44 1527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

