

Product Name: BATTEN CCT WS

General information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.



Luminaires marked with this symbol must not be covered with thermally insulating material.




This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

Dimensions

	A (mm)	B (mm)	C (mm)
XCSBT2	600	55	58
XCSBT4	1200	55	58
XCSBT5	1500	55	58
XCSBT6	1800	55	58
	D (mm)		
FIXING CENTRE (Exc XCSBT2)	610		


Product Name: BATTEN CCT WS

1

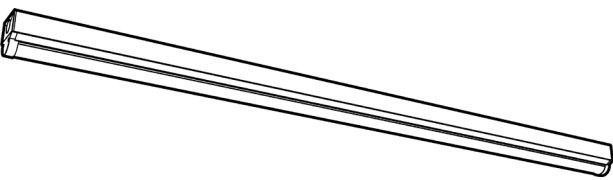


Remove the product from its packaging.

2

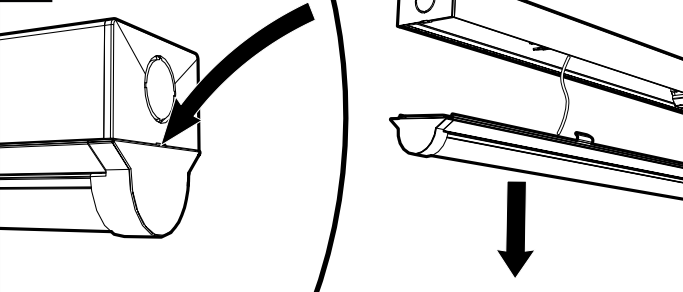


Release the lamp unit from the luminaire body.

3

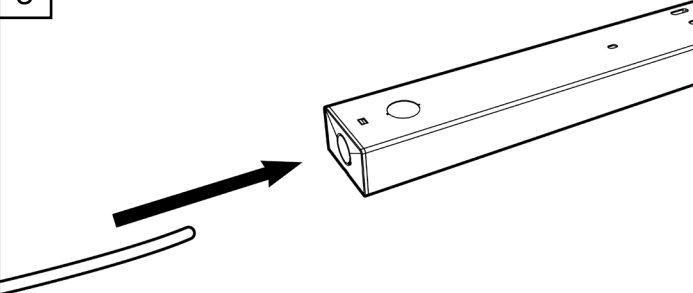


Select appropriate cable entry point and install incoming supply cable.

4

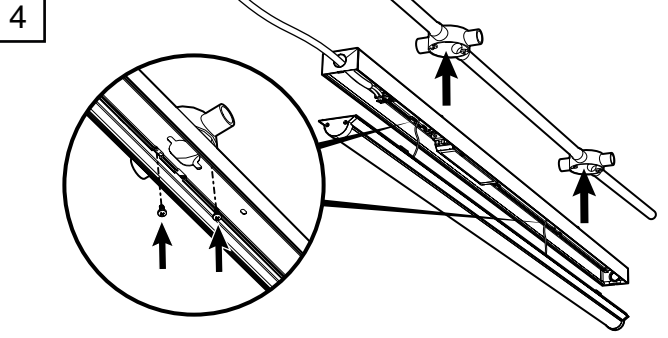


Mount luminaire body to mounting surface or BESA connection points.

5



N Earth L

Neutral Earth Live



N Earth L_{SW} L_{UN}

Neutral Earth Switched Live Permanent Live

Terminations shown for standard and emergency variants.

6

Below wattage table shown for NW

COLOUR TEMPERATURE SELECTION


DL NW WW

WATTAGE SELECTION

	T218	T434	T554	T659		
11W	20W	31W	34W	200mA	-	-
13W	25W	39W	42W	250mA	-	ON
15W	30W	46W	51W	300mA	ON	-
18W	35W	54W	60W	350mA	ON	ON


Make sure the power is off and select wattage and colour temperature.

7

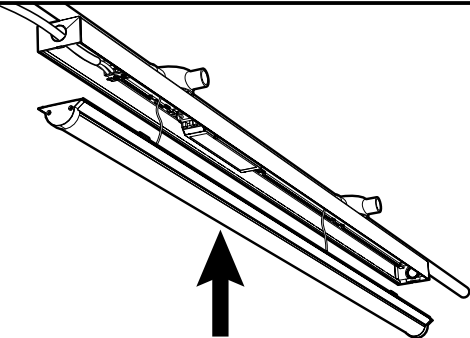

Reattach the lamp unit.

8

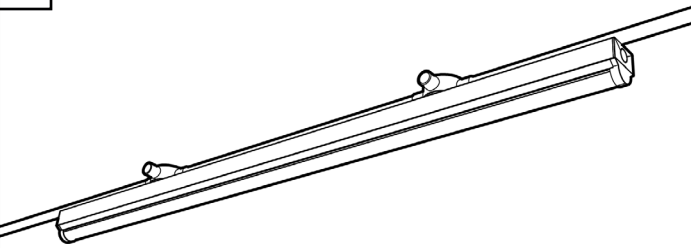

Page 2 of 2

Tamlite Technical
Stafford Park 12,
Telford, Shropshire,
TF3 3BJ

+44(0)1952 292441
technical@tamlite.co.uk
Document No: V1

