




# 2020 i3

High quality LED light source, ideal for retail applications

Fully adjustable up to 350° rotation and 45° tilt

High efficiency LED module with remote driver



LIAQA AWARD  
WINNER 2017



Lighting for  
**a Living**

# 2020 i3

## RECESSED ADJUSTABLE LED DOWNLIGHT



5 YR

IP20



4000K

3000K

### FEATURES

- > High quality LED light source, ideal for retail applications
- > High efficiency LED module with remote driver
- > Fully adjustable up to 350° rotation and 45° tilt
- > Full range of gear options including dimmable, DALI and emergency available
- > CRI: Ra>80
- > Up to 100 lumens per Watt efficacy
- > 50,000 hours lifetime (L70/B50)

### CONSTRUCTION

- > Die-cast aluminium body finished in white (RAL 9010)
- > Polished aluminium reflector
- > Remote driver
- > Supplied as standard with neutral white (4000K) LED

### TO SPECIFY ORDER


High output recessed LED downlight as per Tamlite i3 range

### INSTALLATION NOTES

Recessed into plasterboard or exposed grid ceiling via spring clips

### OPTIONS

- /HFD** Digital dimmable version
- /DALI** DALI dimming control gear
- /RM3** Remote maintained 3 hour emergency
- /WW** Warm White (3000K)

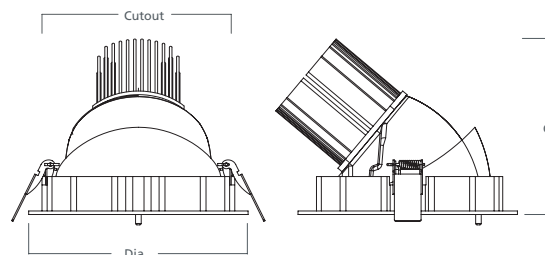

## RECESSED ADJUSTABLE LED DOWNLIGHT

Order Code	Description	lm	W	lm/W	C (mm)	Dia. (mm)	Cut-Out (mm)	kg
TD20MCR160NW	20W - 4000K	2000	20	100	125	155	140	0.95
TD20MCR250NW	30W - 4000K	3000	30	100	125	155	140	0.95



HIGH QUALITY LED LIGHT SOURCE, IDEAL FOR  
RETAIL APPLICATIONS



# Contact Us

## Sales Centre

Tamlite Field Sales Centre,  
Park Farm Industrial Estate,  
Redditch, Worcestershire,  
B98 0HU

T. +44 1527 517 777  
E. [sales@tamlite.co.uk](mailto:sales@tamlite.co.uk)  
W. [tamlite.co.uk](http://tamlite.co.uk)

