





ASTRO

High quality construction for reliability and performance

Low glare opal diffuser, ideal for corridors and toilets

Available in 2 different outputs



ASTRO

HIGH OUTPUT LED DOWNLIGHT



5 YR

IP54



4000K

3000K

FEATURES

- > Low glare opal diffuser, ideal for corridors and toilets
- > Available in 2 different outputs
- > High quality construction for reliability and performance
- > Ideal replacement for 26-32W PL-T downlights
- > Full range of gear options including dimmable, DALI and emergency available
- > CRI: Ra>80
- > Up to 110 lumens per Watt efficacy
- > 50,000 hours lifetime (L70/B50)

CONSTRUCTION

- > Die-cast aluminium body finished in white (RAL 9010)
- > Opal styrene diffuser
- > Remote driver
- > Supplied as standard with neutral white (4000K) LED

TO SPECIFY ORDER


High output LED downlight as per TamLite 'ASTRO' range

INSTALLATION NOTES

Recessed into plasterboard or exposed grid ceiling via spring clips and wired to 3-way connection on driver

OPTIONS

- /HFD** Digital dimmable version
- /DALI** DALI dimming control gear
- /RM3** Remote maintained 3 hour emergency
- /WW** Warm White (3000K)

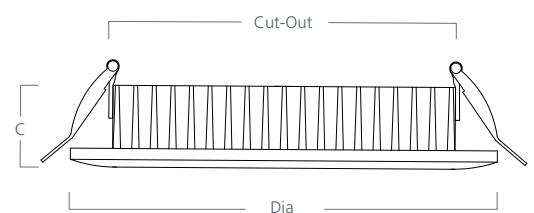

HIGH OUTPUT LED DOWNLIGHT

Order Code	Description	lm	W	lm/W	C (mm)	Dia. (mm)	Cut-Out (mm)	kg
TD-AST220NW	20W - 4000K	2200	20	110	45	230	205	0.77
TD-AST320NW	30W - 4000K	3000	30	100	45	230	205	0.84



LOW GLARE OPAL DIFFUSER,
IDEAL FOR CORRIDORS AND TOILETS



Contact Us

Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. +44 1527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

