





AXIS

Tamlite LG7 I-Tech profiled diffuser provides ceiling illumination with glare control



Centre nano prism optic for compliance with EN-12464

Recessed LED module with profiled diffuser optic



AXIS

RECESSED LED MODULE WITH PROFILED DIFFUSER OPTIC



5 YR

IP20



4000K

FEATURES

- > Recessed LED module with profiled diffuser optic
- > Tam-lite LG7 I-Tech profiled diffuser provides ceiling illumination with glare control
- > Centre nano prism optic for compliance with EN-12464
- > Suitable for general or task area lighting
- > 3 different outputs for low, medium or high spacing layouts
- > Driver gear options of DALI, Emergency and Ready2Mains dimming available
- > CRI: Ra>80
- > Up to 125 lumens per Watt efficacy
- > 50,000 hours lifetime (L70/B50)

CONSTRUCTION

- > Steel body finished in white (RAL 9016)
- > Opal polycarbonate diffuser
- > Supplied as standard with neutral white (4000K) LED

TO SPECIFY ORDER


Recessed LED module with glare control diffuser as per Tam-lite AXIS range

INSTALLATION NOTES

See installation guide for ceiling types

OPTIONS

- /HFR** High frequency analogue dimming
- /HFD** Digital dimmable version
- /DALI** DALI dimming control gear
- /M3** 3 hours integrated emergency
- /AST** Emergency self test

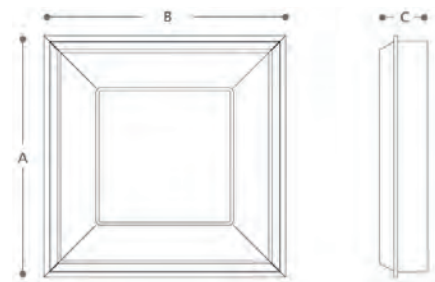

RECESSED LED MODULE WITH PROFILED DIFFUSER OPTIC

Order Code	Description	lm	W	lm/W	A (mm)	B (mm)	C (mm)	Cut-Out (mm)	kg
AX66220NV	18W - 4000K	2200	18	122	595	595	118	595 x 595	4.35
AX66300NW	24W - 4000K	3000	24	125	595	595	118	595 x 595	4.35
AX66450NV	38W - 4000K	4500	38	118	595	595	118	595 x 595	4.35



OFFICE - SUITABLE FOR USE IN OFFICES,
SCHOOLS AND UNIVERSITIES

QUICK-FIX
POWER ENTRY



Contact Us

Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. +44 1527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

