






CORNICE

Corner mounted profile is ideal for corridor and walkway areas

High quality aluminium extrusions

Suspended mounted option



LIAQA AWARD
WINNER 2017



Lighting for
a Living

CORNICE

LED CORNER LIGHT



5 YR

IP20



5000K

4000K

3000K

FEATURES

- > High quality aluminium extrusions
- > Corner mounted profile is ideal for corridor and walkway areas
- > Suspended mounted option
- > Driver gear options of DALI, Emergency and Ready2Mains dimming available
- > CRI: Ra>80
- > Up to 111 lumens per Watt efficacy
- > 50,000 hours lifetime (L70/B50)

CONSTRUCTION

- > Extruded aluminium body finished in white (RAL 9016)
- > Opal polycarbonate diffuser
- > Rear or 2 x side cable entry
- > High output micro-prism diffuser option
- > Supplied as standard with neutral white (4000K) LED

TO SPECIFY ORDER


LED Corner wall luminaire as per TamLite CORNICE range

INSTALLATION NOTES

Wall or ceiling fix base mounting with rear or side cable entry

OPTIONS

- /HFR High frequency analogue dimming
- /HFD Digital dimmable version
- /M3 3 hours integrated emergency
- /AST Emergency self test
- /WW Warm White (3000K)
- /CW Cool White (5000K)
- /MPRM Micro-prism diffuser

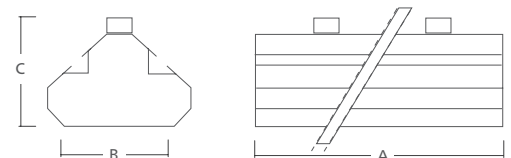

LED CORNER LIGHT

Order Code	Description	lm	W	lm/W	A (mm)	B (mm)	C (mm)	kg
CORCM3240NW	23W - 4000K	2400	23	104	875	101	64	2.30
CORCM4300NW	28W - 4000K	3000	28	107	1165	101	64	3.00
CORCM5420NW	38W - 4000K	4200	38	111	1455	101	64	3.70



CORNER MOUNTED PROFILE IS IDEAL
FOR CORRIDOR AND WALKWAY AREAS



Contact Us

Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. +44 1527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

