

Product Name: DECO WL DOWN PIR GU10

General Information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.

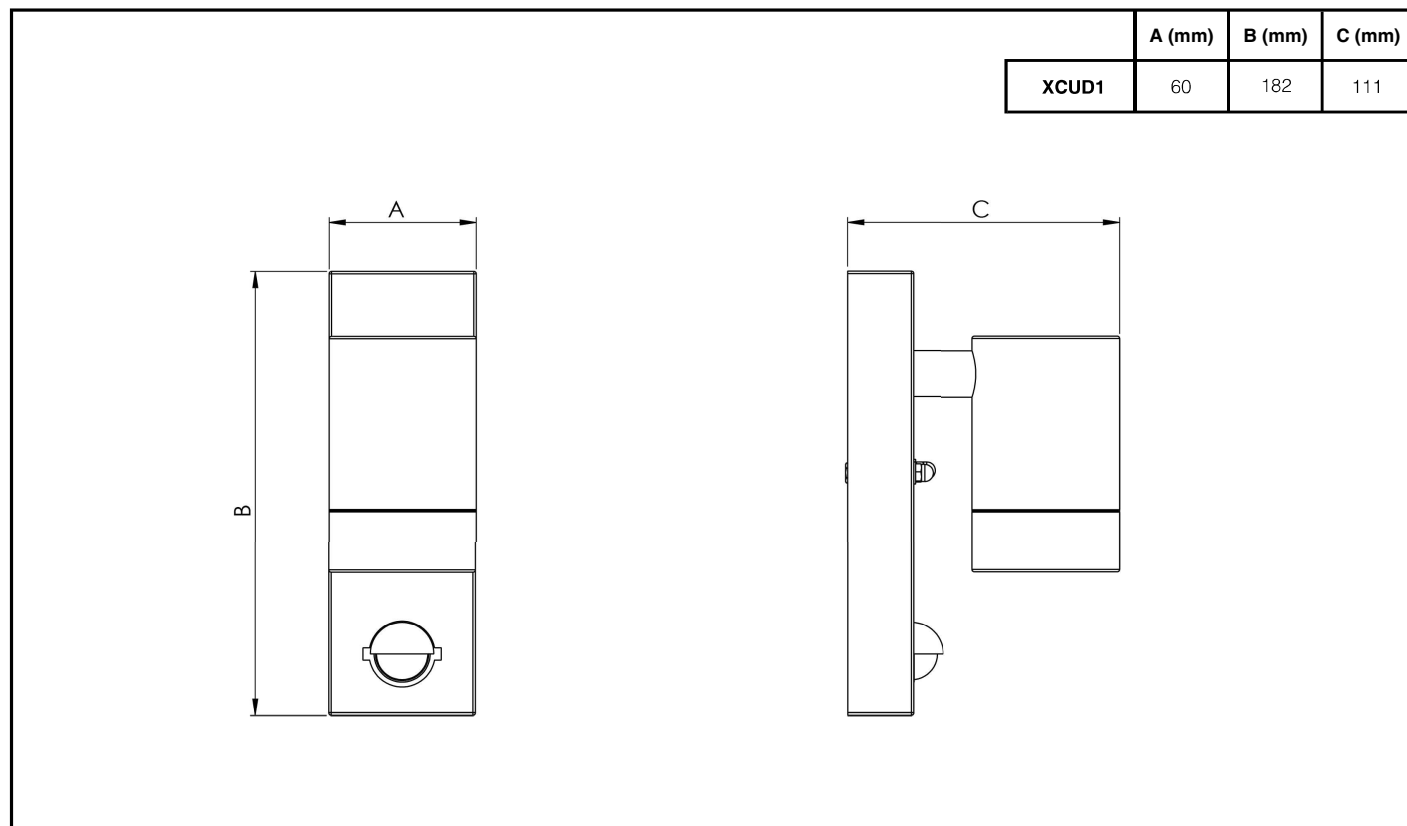


Luminaires marked with this symbol must not be covered with thermally insulating material.

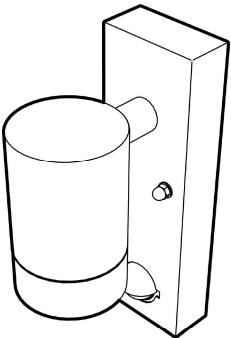
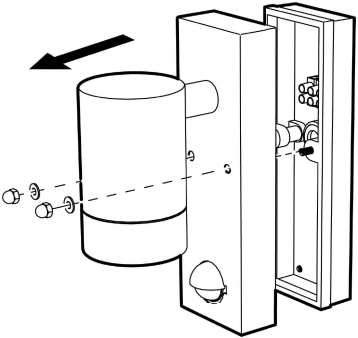
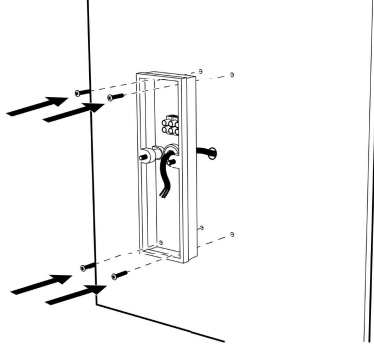
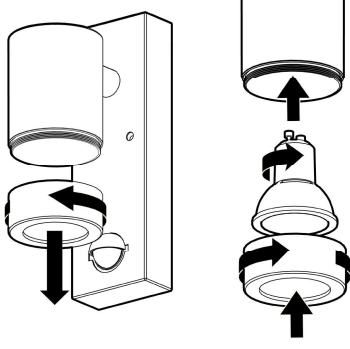
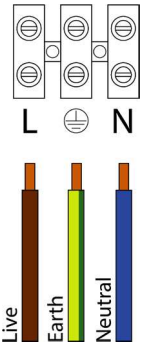
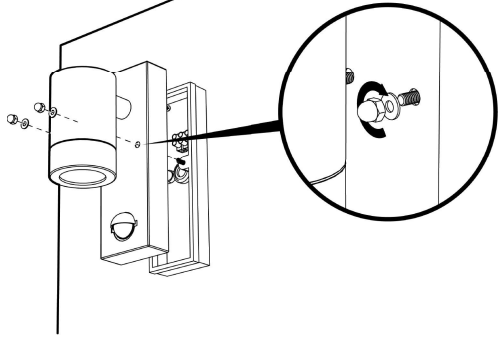
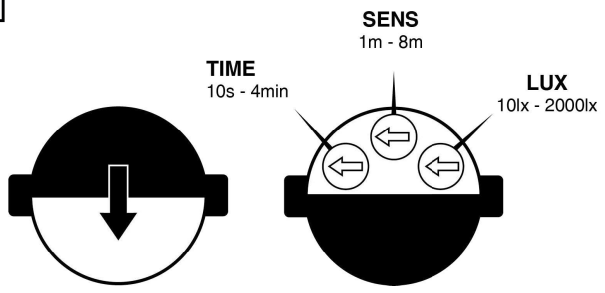


This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

Dimensions



Product Name: DECO WL DOWN PIR GU10

<p>1</p>  <p>Remove the product from its packaging.</p>	<p>2</p>  <p>Remove the two nuts to release the mounting plate.</p>
<p>3</p>  <p>Bring supply cable through mounting plate and secure with appropriate hardware.</p>	<p>4</p>  <p>Unscrew lamp cover and install LED GU10 (max 20W). Re-attach lamp cover.</p>
<p>5</p>  <p>Terminate supply cable as shown.</p>	<p>6</p>  <p>Re-assemble the luminaire and tighten the two nuts.</p>
<p>7</p>  <p>Push the PIR lid down to uncover the PIR adjustment dials.</p>	<p>8</p> <p>Load - Max: 20W</p> <p>Lux Control - The desired lux level at which the luminaire will switch on/off can be set by rotating the LUX dial.</p> <p>Time Control - The length of time that the luminaire stays on from 10 seconds up to 4 minutes can be adjusted by rotating the TIME dial.</p> <p>PIR Override - The sensor has a manual override function. Switch the power off and on twice within 3s period to activate the manual override. Repeat to return to PIR function</p> <p>Sensitivity - Rotate the SENS dial to increase or decrease the distance of which movement will be picked up, from 1 to 8 meters.</p>