





N I M R O D

High performance LED array

High quality LED bulkhead

Finished in black or white



LIAQA AWARD
WINNER 2017



Lighting for
a Living

NIMROD

SQUARE OR CIRCULAR LED BULKHEAD



5 YR

IP65



4000K

NL

FEATURES

- > High quality LED bulkhead
- > High performance LED array
- > Full range of gear options including dimmable, DALI and emergency are available
- > CRI: Ra>80
- > Up to 106 lumens per Watt efficacy
- > 50,000 hours lifetime (L70/B50)

CONSTRUCTION

- > Polycarbonate body finished in Black or white
- > Opal or prismatic polycarbonate diffuser
- > Supplied with neutral white (4000K) LED
- > Note: Colour and diffuser option must be specified when ordering. /HFS and /HFS/D for 285mm body only. /PC for external use only

OPTIONS


/PC	Photocell
/HFS	Microwave movement sensor
/HFD	Digital dimmable version
/HFS D	Dimmable microwave movement sensor
/DALI	DALI dimming control gear
/M3	3 hours integrated emergency
/AST	Emergency self test
/NL	Night-light
/B	Black
/W	White
/O	Opal diffuser
/PRIS	Prismatic diffuser

TO SPECIFY ORDER

LED polycarbonate IP65 bulkhead as per TamLite NIMROD LED range

INSTALLATION NOTES

Wall or ceiling fix base mounting with rear or side cable entry and wired via rear cable entry

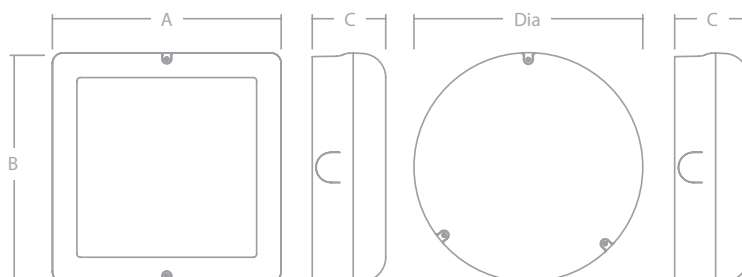

SQUARE OR CIRCULAR LED BULKHEAD

Order Code	Description	lm	W	lm/W	A (mm)	B (mm)	C (mm)	Dia. (mm)	kg
NIM17LEDNW	17W - 4000K	1200	17	71	285	285	90	-	1.1
CNIM17LEDNW	17W - 4000K	1200	17	71	-	-	90	285	1.0



NIM17/LED/BP



NIM17/LED/WO



NIM17/LED/WP



NIM17/LED/BO



COMMUNAL OR URBAN - IDEAL FOR ACHIEVING DESIGN
PERFORMANCE IN CORRIDOR AREAS OR EXTERIOR



Contact Us

Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. +44 1527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

