





W I N D S O R

Polycarbonate prismatic 850°C diffuser for use on all escape routes

Steel body finished in white (RAL 9016)

Fully flush LED design



LIAQA AWARD
WINNER 2017



Lighting for
a Living

WINDSOR

RECESSED EMERGENCY BULKHEAD, 3 HOUR RATED

5 YR

IP20



4000K

FEATURES

- > Fully flush LED design
- > Opal option available
- > 3 hours rated
- > 30,000 hours lifetime (L70/B50)

CONSTRUCTION

- > Steel body finished in white (RAL 9016)
- > Polycarbonate prismatic 850°C diffuser for use on all escape routes
- > Supplied as standard with neutral white (4000K) LED

TO SPECIFY ORDER

Recessed flush emergency bulkhead as per TamLite WINDSOR range

INSTALLATION NOTES


Recessed fix via mounted bracket (supplied)

OPTIONS

- /AST Emergency self test
/O Opal diffuser

ACCESSORIES

- WIN/EURO1** Running man, right arrow self adhesive legend
WIN/EURO2 Running man, left arrow self adhesive legend
WIN/EURO3 Running man, down arrow self adhesive legend
WIN/EURO4 Running man, up arrow self adhesive legend

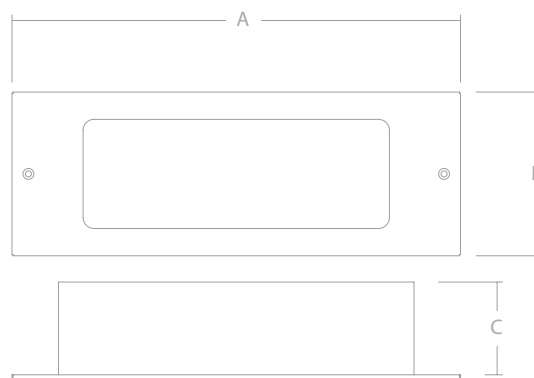

RECESSED EMERGENCY BULKHEAD, 3 HOUR RATED

Order Code	Description	lm	W	lm/W	A (mm)	B (mm)	C (mm)	kg
WINLEDM3	4W - 4000K Maintained	-	4	-	412	150	85	1.10



EMERGENCY - POLYCARBONATE PRISMATIC 850°C
DIFFUSER FOR USE ON ALL ESCAPE ROUTES



Contact Us

Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. +44 1527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

