ADVANCE S




Surface LED module with profiled diffuser

I-Tech multi-cell optic provides excellent glare control with BS EN-12464 compliance Suitable for office installations and general or task area lighting



ADVANCE S







- lighting

 Surface LED module with profiled diffuser

 I-Tech multi-cell optic provides excellent glare control with BS EN-12464 compliance
- CRI: Ra>80
- Up to 130 lumens per Watt efficacy
- 50,000 hours lifetime (L80/B10)









Surface LED module

Order Code	Description	lm	W	lm/W	kg
ADVS66200NW	17W - 4000K	2000	17	118	8.70
ADVS66300NW	25W - 4000K	3000	25	120	8.70
ADVS66400NW	34W - 4000K	4000	34	118	8.70

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
ADVS66200NW	592	592	80
ADVS66300NW	592	592	80
ADVS66400NW	592	592	80



- Steel body finished in white (RAL 9016)
- Opal and semi-prismatic polycarbonate diffuser - TP(a) rated

OPTIONS


D	Dimmable DALI
МЗ	3 hours integrated emergency
A3	Emergency self test
D3	DALI self test
CT	Tunable white (2700K - 6500K)

INSTALLATION NOTES

Surface fix to ceiling via 4 corner mount 20mm dia. fixing holes and wired via 3 pole terminal block


TO SPECIFY

Surface multi-optic module to EN 12464 as per Tamlite ADVANCE range

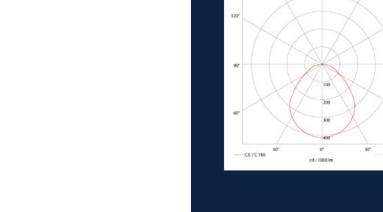

Lighting for a Living





Tamlite Lighting Sales Centre

Tamlite Field Sales Centre, Park Farm Industrial Estate, Redditch, Worcestershire, B98 0HU

T. 01527 517 777E. sales@tamlite.co.ukW. tamlite.co.uk

Over 50 years lighting for a Living

As a UK manufacturer we have one of the widest lighting ranges across:





















Communal

Education

Emergency

Healthcare

Industrial

Office

Retail & Leisure

Sports

Urban

Warehouse & Logistics