

# ARCO



Modern stylish profile ideal for architects and designers

High performance LED modules and integral drivers

Indirect and direct output continuous system



Lighting for  
**a Living**

# ARCO



- Modern stylish profile ideal for architects and designers
- Indirect and direct output continuous system
- White or silver grille optic also available
- Opal diffuser as standard
- Wide range of connection and suspension kits available
- Full range of gear options including DALI and emergency
- CRI: Ra>80
- Up to 128 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)




### Linear suspended continuous modular system

Order Code	Description	lm	W	lm/W	kg
ARC22R120OPNW	10W - 4000K	1200	10	120	3.80
ARC22R180OPNW	15W - 4000K	1800	15	120	3.80
ARC42R210OPNW	17W - 4000K	2100	17	124	4.90
ARC42R350OPNW	28W - 4000K	3500	28	125	4.90
ARC52R410OPNW	32W - 4000K	4100	32	128	5.75
ARC52R700OPNW	57W - 4000K	7000	57	123	5.75

### Dimensions

Order Code	A (mm)	B (mm)	C (mm)
ARC22R120OPNW	1520	140	65
ARC22R180OPNW	1520	140	65
ARC42R210OPNW	2120	140	65
ARC42R350OPNW	2120	140	65
ARC52R410OPNW	2420	140	65
ARC52R700OPNW	2420	140	65

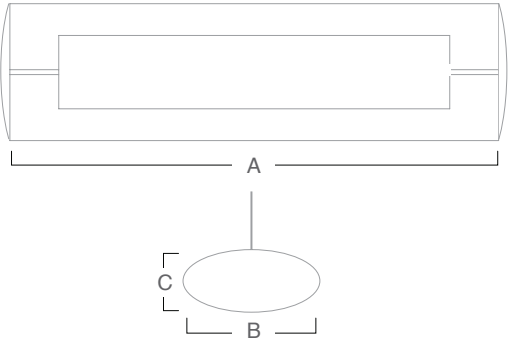

### ARCO Uplight



### CONSTRUCTION

- Extruded aluminium body finished in white (RAL 9010)
- Opal PMMA diffuser as standard
- Polycarbonate grille option for direct light content
- Supplied as standard with neutral white (4000K) LED

### OPTIONS


M3	3 hours integrated emergency
V202	Integral PIR device
V203	Integral PIR dimming device
D	DALI dimming control gear
WW	Warm white (3000K)
CW	Cool white (5000K)

### INSTALLATION NOTES

Suspended via wire suspension kits and wired to 3 pole termination block

### TO SPECIFY


Linear continuous module system as per Tam-lite ARCO range

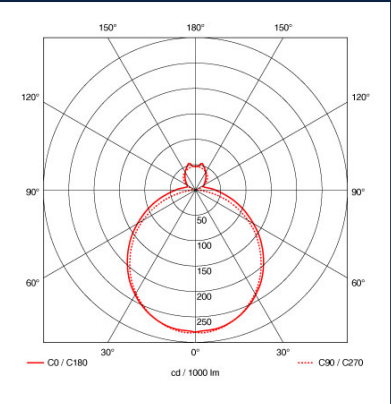


Lighting for a Living

# ARCO ACCESSORIES


ARC2/4/5MT




ARC6M



ARCSC




ARCEC




## ARCO CONNECTION

Order Code	Description	A (mm)	B (mm)	C (mm)	kg
ARC2MT	1.0m section with 3 circuit mains track	1080	140	65	3.17
ARC4MT	1.3m section with 3 circuit mains track	1380	140	65	4.04
ARC5MT	1.6m section with 3 circuit mains track	1680	140	65	4.91
ARC6M	1.9m blank module	1980	140	65	5.78
ARCEC	End cap	7.50	140	65	0.05
ARCSC	Straight connector	14	140	65	0.07



ARC90





ARCTC



ARCXC

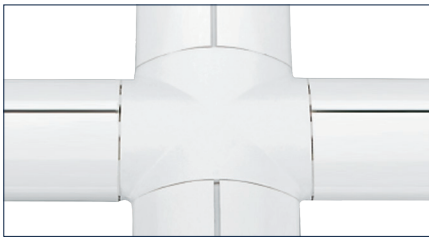

ARCFC

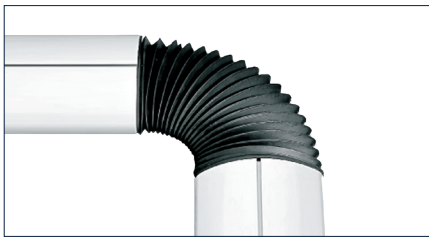

## ARCO CONNECTION

Order Code	Description	A (mm)	B (mm)	C (mm)	kg
ARC90	90 Degree connector	150	150	65	0.21
ARCTC	T connector	150	150	65	0.28
ARCXC	Cross connector	160	160	65	0.32
ARCFC	Flexible connector	280	140	65	0.41

## Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,  
Park Farm Industrial Estate,  
Redditch, Worcestershire,  
B98 0HU

T. 01527 517 777  
E. [sales@tamlite.co.uk](mailto:sales@tamlite.co.uk)  
W. [tamlite.co.uk](http://tamlite.co.uk)

## Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail  
& Leisure



Sports



Urban



Warehouse  
& Logistics