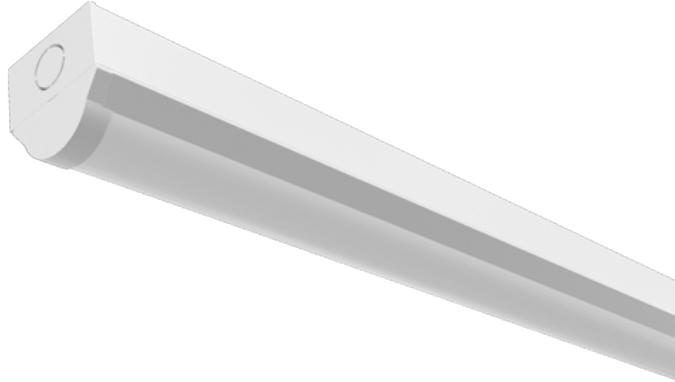


**Order Code: XCBT2X1**

X1 Batten - 600mm - CCT [3000K/4000K/6000K] + Wattage Selectable

**Features**

- Ideal for replacement of linear fluorescent fixtures
- Suitable for general domestic and commercial use
- CCT [3000K/4000K/6000K] adjustable via 3-way selector switch
- Wattage [11W/13W/15W/18W] adjustable via 2-way dip switch

**Construction**

- Slimline steel body finished in white (RAL 9016)
- High quality opal diffuser to reduce glare
- Integral emergency option available
- Loop in/out mains connector
- Conduit and BESA fixing points for end or rear cable entry

**Installation Notes**

Centrally-mounted loop-in, loop-out push fit terminal block

**Technical Data****General**

|                               |                 |
|-------------------------------|-----------------|
| Luminaire Wattage (W)         | 11W/13W/15W/18W |
| Weight (kg)                   | 0.68            |
| Operating Temperature (ta °C) | 45              |

**Light Output**

|                 |              |
|-----------------|--------------|
| Lumens (lm)     | 1300 to 2300 |
| Efficacy (lm/W) | 132          |

**LED**

|                  |    |
|------------------|----|
| CRI              | 85 |
| Macadam Ellipses | 5  |

**Driver**

|                     |                       |
|---------------------|-----------------------|
| Driver Current (mA) | 200 , 250 , 300 , 350 |
| Forward Voltage (V) | 25 to 57              |

**Emergency**

|                           |     |
|---------------------------|-----|
| Emergency Lumen Operating | 264 |
| Emergency Wattage (W)     | 2   |

**Electrical**

|                           |                    |
|---------------------------|--------------------|
| Rated Input Current (A)   | 0.09               |
| Power Factor (pf)         | 0.83 to 0.92       |
| Input Voltage Range (VAC) | 220 to 240         |
| Inrush Current Peak (A)   | 175                |
| Surge Protection (kV)     | L-N 1kV, LN-PG 2kV |
| Conductor Size (mm)       | 0.5 to 2.5         |
| Terminal Type             | 3 pole piano key   |

**Order Code: XCBT2X1**

X1 Batten - 600mm - CCT [3000K/4000K/6000K] + Wattage Selectable

## Dimensions

|        |     |
|--------|-----|
| A (mm) | 600 |
| B (mm) | 55  |
| C (mm) | 58  |

## Line Drawing

