

CAMPUS



Surface module with opal diffuser, ideal for schools and corridors

Available in 2 sizes and 2 outputs

Gear options including DALI and emergency available



Lighting for
a Living

CAMPUS



- Surface module with opal diffuser, ideal for schools and corridors
- Available in 2 sizes and 2 outputs
- Gear options including DALI and emergency available
- CRI: Ra>80
- Up to 130 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

5 YR

IP20



IK04

TP(a)



Surface LED module

Order Code	Description	lm	W	lm/W	kg
CMP4390NW	33W - 4000K	3900	33	118	1.70
CMP5690NW	53W - 4000K	6900	53	130	2.00

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
CMP4390NW	1203	150	70
CMP5690NW	1503	150	70

CONSTRUCTION

- Steel body with BESA fixings and rear or end cable-entry
- White (RAL 9016)
- Opal diffuser
- Supplied as standard with neutral white (4000K) LED

OPTIONS



D	Dimmable DALI
M3	3 hours integrated emergency
A3	Emergency self test
D3	DALI self test

INSTALLATION NOTES

Surface fix via rear mounting holes and wired via 3-pole terminal block

TO SPECIFY

LED surface module as per Tamplate CAMPUS range

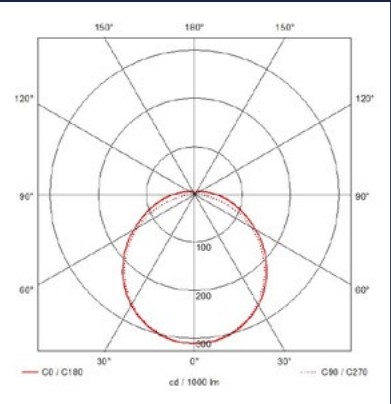

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics