

CAPITAL S



Recessed module for SAS 330 ceiling types


Also available for lay-in, plasterboard or Burgess type ceilings

I-Tech microprism optic provides excellent glare control with BS EN-12464 compliance



Lighting for
a Living

CAPITAL S

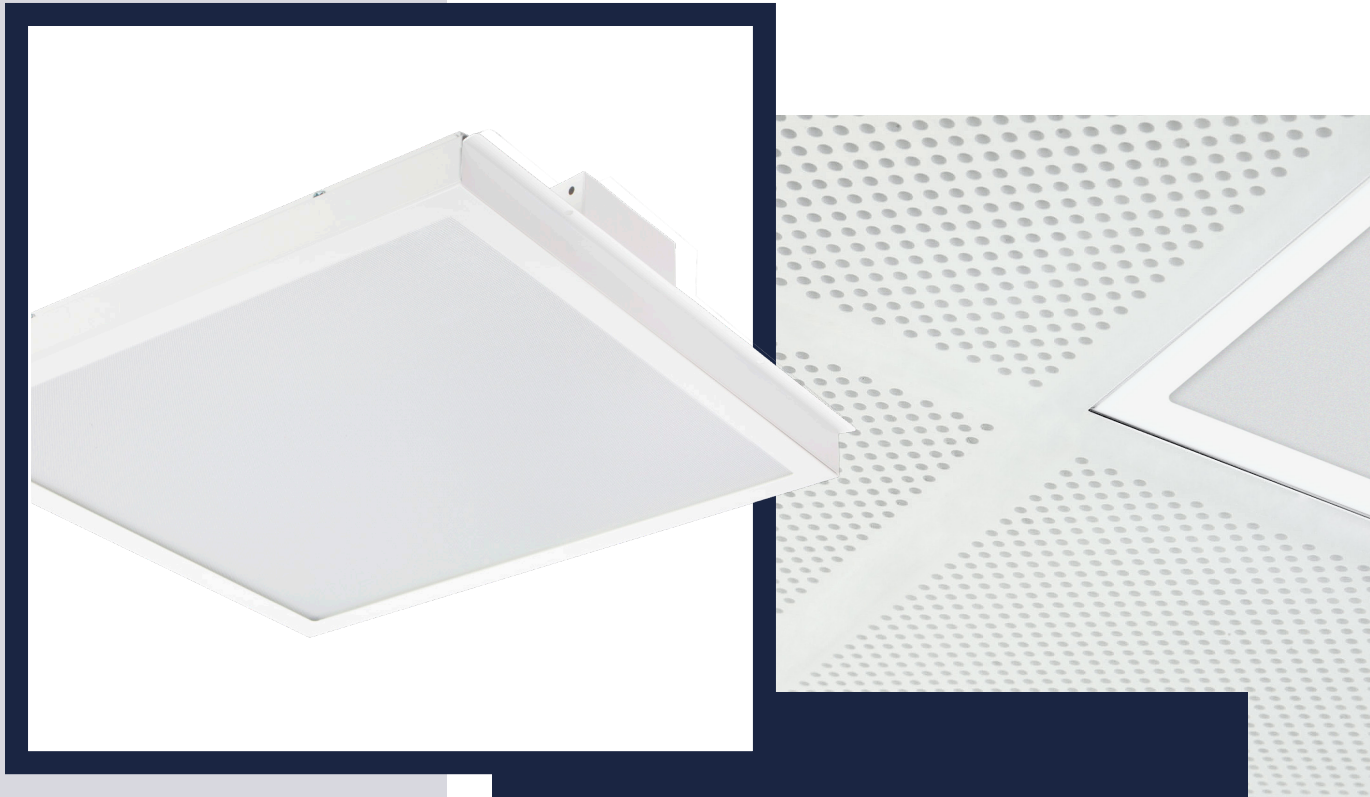

- Recessed module for SAS 330 ceiling types
- Also available for lay-in, plasterboard or Burgess type ceilings
- I-Tech microprism optic provides excellent glare control with BS EN-12464 compliance
- Suitable for office installations and general or task area lighting
- Available in 3 standard sizes with bespoke, retro-fit versions available
- Gear options of DALI and Emergency
- Air handling for 40 litres/second option
- CRI: Ra>80
- Up to 120 lumens per Watt efficacy
- 50,000 hours lifetime
- Wieland 3/4 pole connector on rear of body for mains connection



5 YR

IP20




TP(a)

Recessed module for SAS type ceilings

Order Code	Description	lm	W	lm/W	kg
CPS66MP300NW	25W - 4000K Microprism diffuser	3,000	25	120	5.53
CPS123MP300NW	28W - 4000K Microprism diffuser	3,000	28	107	6.19

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
CPS66MP300NW	626	595	98
CPS123MP300NW	1220	297	99

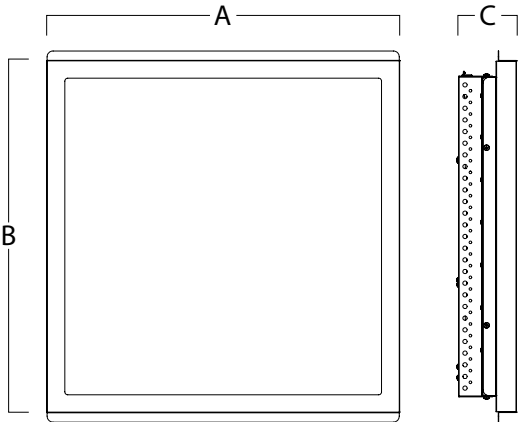

CONSTRUCTION

- Pressed steel body
- Prismatic polycarbonate diffuser
- Supplied as standard with neutral white (4000K) LED

OPTIONS


D	Dimmable DALI
M3	3 hours integrated emergency
A3	Emergency self test
D3	DALI self test

INSTALLATION NOTES

View or download the ceiling compatability guide

TO SPECIFY

Recessed module for SAS type ceilings as per TamLite CAPITAL S range

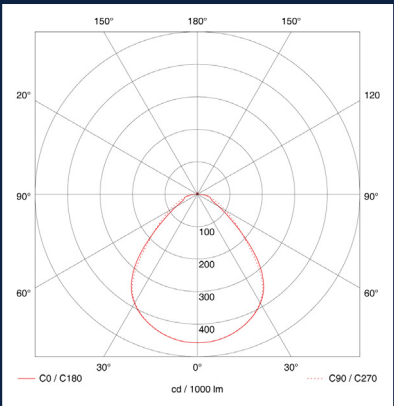

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics