

CITY GL



High output ground light suitable for architectural applications

Vandal resistant (Maximum vehicle load of 1840kg at 30mph)

Supplied with 24° symmetric reflector



Lighting for
a Living

CITY GL



- High output ground light suitable for architectural applications
- Vandal resistant (Maximum vehicle load of 1840kg at 30mph)
- Supplied with 24° symmetric reflector
- CRI: Ra>80
- Up to 56 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

5 YR

IP67




High output exterior accent ground light

Order Code	Description	lm	W	lm/W	kg
TA2020GL13NW	13W - 4000K	600	13	46	2.60
TA2020GL19NW	19W - 4000K	1000	19	53	3.00
TA2020GL32NW	32W - 4000K	1800	32	56	7.40

Dimensions

Order Code	C (mm)	Dia. (mm)	Cut-Out (mm)
TA2020GL13NW	142	173	163 X 220
TA2020GL19NW	158	210	179 X 220
TA2020GL32NW	176	250	222 X 220

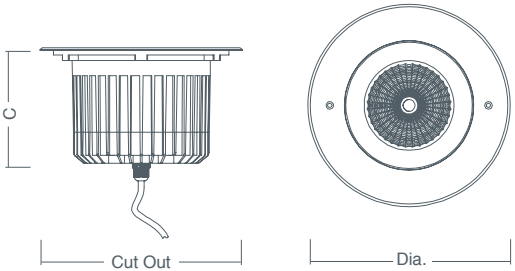

PVC Mounting Sleeve



CONSTRUCTION


- Die-cast aluminium body finished in silver (RAL 9005)
- Stainless steel trim (SUS 316L)
- PVC mounting sleeve
- Supplied with 0.5m H05RN 3-core, 1.0mm cables and PG-9 PVC cable gland
- Symmetric beam as standard
- Supplied as standard with neutral white (4000K) LED

INSTALLATION NOTES

Recessed into PVC mounting sleeve, fixed with stainless steel screws

TO SPECIFY

High output exterior accent ground light as per TamLite CITY GL range

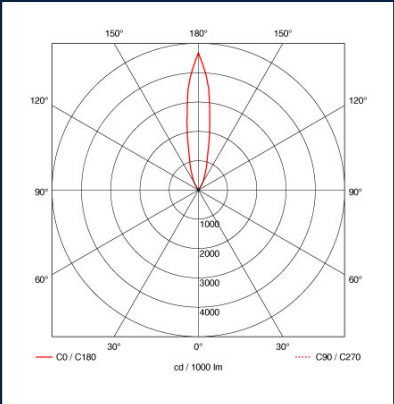

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics