

# CITY SL



Suitable for architectural and building illumination

20° beam angle as standard

Up to 75 lumens per Watt efficacy



Lighting for  
**a Living**

# CITY SL



- Suitable for architectural and building illumination
- 20° beam angle as standard
- CRI: Ra>90
- Up to 75 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

5 YR

IP65




## High output exterior spotlight

Order Code	Description	lm	W	lm/W	kg
TA2020SL12NW	12W - 4000K	890	12	74	2.00
TA2020SL24NW	24W - 4000K	1800	24	75	2.80

## Dimensions

Order Code	B (mm)	C (mm)	Dia.
TA2020SL12NW	193	145	151
TA2020SL24NW	217	146	177

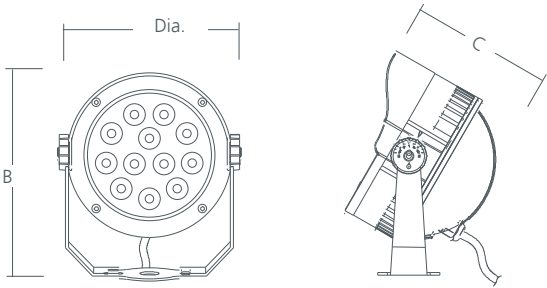

## CONSTRUCTION


- Aluminium body finished in grey (RAL 9006)
- Supplied with 2 x 2.0m H05RN 2-core, 1.0 mm cables and PG-9 PVC cable gland
- 4mm tempered glass
- Supplied as standard with neutral white (4000K) LED

## INSTALLATION NOTES

Surface mount via die-cast aluminium bracket

## TO SPECIFY

Spotlight as per TamLite CITY SL range

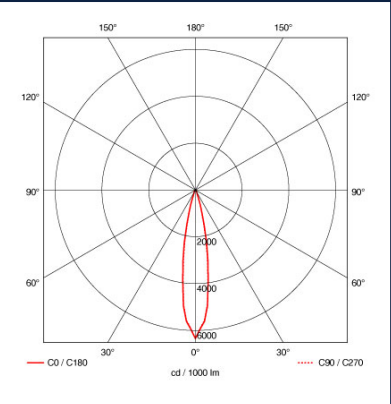

Lighting for a Living

## Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,  
Park Farm Industrial Estate,  
Redditch, Worcestershire,  
B98 0HU

T. 01527 517 777  
E. [sales@tamlite.co.uk](mailto:sales@tamlite.co.uk)  
W. [tamlite.co.uk](http://tamlite.co.uk)

## Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail  
& Leisure



Sports



Urban



Warehouse  
& Logistics