

CITY WP



High performance circular wall light

Maximum of 10m spacing, at 3m mounting height

Dark sky optic to reduce upward light output with less than 2% ULOR



Lighting for
a Living

CITY WP



- High performance circular wall light
- Maximum of 10m spacing, at 3m mounting height
- Dark sky optic to reduce upward light output with less than 2% ULOR
- Choice of 2 outputs
- Photocell and VISION SMART options available
- CRI: Ra>80
- 100 lumens per Watt efficacy
- 84,000 hours lifetime (L80/B20)

5 YR

IP65



IK08





Exterior wall light

Order Code	Description	lm	W	lm/W	kg
CWP180NWB	18W - 4000K - Black	1800	18	100	2.80
CWP180NWG	18W - 4000K - Grey	1800	18	100	2.80
CWP280NWB	28W - 4000K - Black	2800	28	100	2.80
CWP280NWG	28W - 4000K - Grey	2800	28	100	2.80

Dimensions

Order Code	C (mm)	Dia.
CWP180NWB	90	320
CWP180NWG	90	320
CWP280NWB	90	320
CWP280NWG	90	320



Black Option



CONSTRUCTION

- Die-cast aluminium body finished in grey (RAL 9006) or black (RAL 9005)
- Supplied as standard with neutral white (4000K) LED

OPTIONS


PC	Photocell
D	Dimmable DALI
M3	3 hours integrated emergency
A3	Emergency self test
D3	DALI self test

INSTALLATION NOTES

Fixed via rear mounting plate and wired via cable entry

TO SPECIFY

Dark sky circular wall light as per TamLite CITY WP range

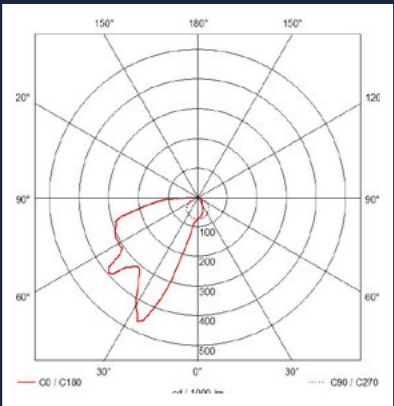

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics