


## Order Code: XCBT5X1M3

X1 Batten - 1500mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency

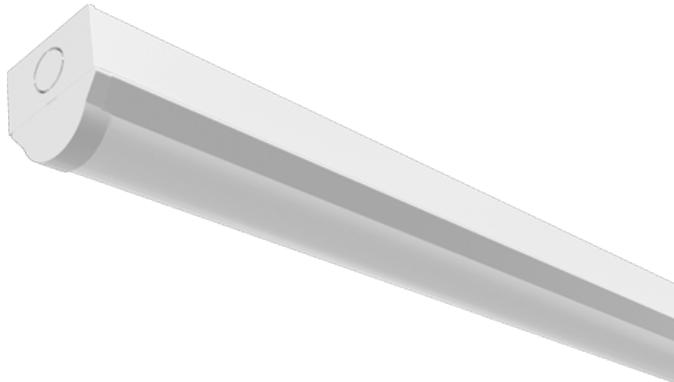

## Features

- Ideal for replacement of linear fluorescent fixtures
- Suitable for general domestic and commercial use
- CCT [3000K/4000K/6000K] adjustable via 3-way selector switch
- Wattage [31W/39W/46W/54W] adjustable via 2-way dip switch

## Construction

- Slimline steel body finished in white (RAL 9016)
- High quality opal diffuser to reduce glare
- Integral emergency option available
- Loop in/out mains connector
- Conduit and BESA fixing points for end or rear cable entry

## Installation Notes

Centrally-mounted loop-in, loop-out push fit terminal block

## Technical Data

## General

Luminaire Wattage (W)	31W/39W/46W/54W
Weight (kg)	1.93
Operating Temperature (ta °C)	45

## Light Output

Lumens (lm)	4200 to 7600
Efficacy (lm/W)	146

## LED

CRI	85
Macadam Ellipses	5

## Driver

Driver Current (mA)	200 , 250 , 300 , 350
Forward Voltage (V)	80 to 172

## Emergency

Emergency Lumen Operating	293
Emergency Wattage (W)	2

## Electrical

Rated Input Current (A)	0.26
Power Factor (pf)	0.89 to 0.96
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	200
Surge Protection (kV)	L-N 1kV, LN-PG 2kV
Conductor Size (mm)	0.5 to 2.5
Terminal Type	4 pole piano key

**Order Code: XCBT5X1M3**

X1 Batten - 1500mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency

## Dimensions

A (mm)	1500
B (mm)	55
C (mm)	58
Fix	610

## Line Drawing

