

DELTA



IP65 weatherproof

Full range of gear options including dimmable, DALI and emergency available

CRI: Ra>80



Lighting for
a Living

DELTA



- IP65 weatherproof bulkhead
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 53 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

5 YR

IP65


TP(a)

Circular bulkhead

Order Code	Description	lm	W	lm/W	kg
DEL17LEDNW	17W - 4000K	900	17	53	2.00

Dimensions

Order Code	Dia. (mm)	C (mm)
DEL17LEDNW	340	110

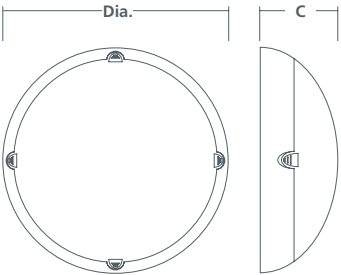

CONSTRUCTION

- Polycarbonate body finished in white
- Opal diffuser
- Supplied as standard with neutral white (4000K) LED

OPTIONS


M3	3 hours integrated emergency
A3	Auto self test
D3	DALI self test
HFS	Microwave movement sensor
HFSD	Dimmable microwave movement sensor
D	DALI dimming control gear
NL	Night-light

INSTALLATION NOTES

Wall or ceiling mount via 20mm rear entry holes and wired via rear cable entry

TO SPECIFY

Circular bulkhead as per TamLite DELTA range

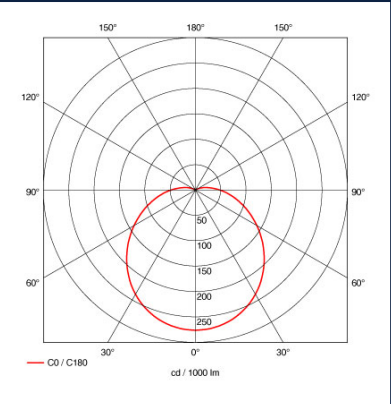

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics