

# ELITE X



Zone 2/22 hazardous area fitting

Suitable for indoor areas of high risk explosions

Wall or ceiling mount



Lighting for  
**a Living**

ELITE X



- Zone 2/22 hazardous area bulkhead
- Suitable for indoor areas of high risk explosions
- Wall or ceiling mount
- For use in ambient temperature range of -20°C to + 40°C
- Certified to EN 60079 zone 2 and zone 22 (DUST)
- Also available in maintained or non-maintained emergency
- ATEX certified for category 3, certified type Ex nR IIC T6 Gc & Ex tc IIIC T65
- CRI: Ra>80
- 100 lumens per Watt efficacy
- 60,000 hours lifetime (L80/B10)

5 YR

IP66



Hazardous area bulkhead

Order Code	Description	lm	W	lm/W	kg
XELB150NW	15W - 4000K - Maintained	1500	15	100	0.90

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
XELB150NW	338	176	110

CONSTRUCTION




- Polycarbonate body finished in Grey (RAL 7035)
- Opal polycarbonate diffuser
- Stainless steel fixing clips
- Supplied with sealing gland and 3 x sealing plugs
- Loop-in/out cabling with additional cable gland (ordered separately)
- Supplied as standard with neutral white (4000K) LED

INSTALLATION NOTES

Surface fix to ceiling or wall via fastening spring and wired to screwless 3 pole terminal block (max 2.5mm²)

TO SPECIFY

Zone 2/22 Hazardous area wall/ceiling as per Tam-lite ELITE X Bulkhead range

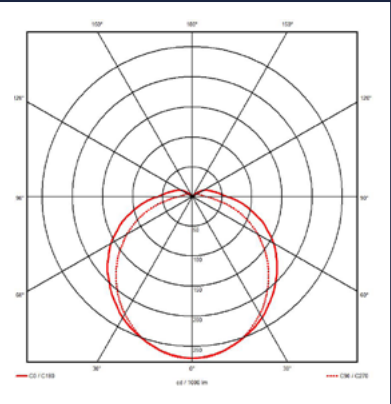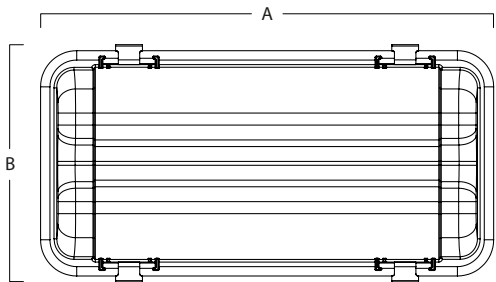

Lighting for a Living

## Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,  
Park Farm Industrial Estate,  
Redditch, Worcestershire,  
B98 0HU

T. 01527 517 777  
E. [sales@tamlite.co.uk](mailto:sales@tamlite.co.uk)  
W. [tamlite.co.uk](http://tamlite.co.uk)

## Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail  
& Leisure



Sports



Urban



Warehouse  
& Logistics