

# EMLUX



Virtually service free emergency lighting

Good spacing performance

High impact vandal resistant



Lighting for  
**a Living**

# EMLUX



- Virtually service free emergency lighting
- Good spacing performance
- High impact vandal resistant
- Versatile emergency bulkhead
- Slave options for central battery system
- Integrated battery charge indicator
- 30,000 hours lifetime (L70/B50)

5 YR

IP65




### Emergency bulkhead

Order Code	Description	lm	W	kg
EMLM3	2W - 4000K Maintained	80	2	1.10

### Dimensions

Order Code	A (mm)	B (mm)	C (mm)
EMLM3	384	114	92

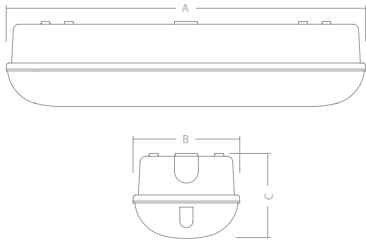

### CONSTRUCTION

- Polycarbonate body and diffuser finished in white or black
- Designed for multiple cable entry for through wiring and BESA box entry
- Supplied as standard with neutral white (4000K) LED

### OPTIONS

A3	Auto self test
D3	DALI self test
TS	Emergency test switch
B	Black (RAL 9005)

### INSTALLATION NOTES

Wall or ceiling fix via rear-mounted fixing and cable entry


### TO SPECIFY

Polycarbonate IP65 emergency bulkhead as per TamLite EMLUX range

### ACCESSORIES

- EXIS1 Running man, left/right arrow double sided legend
- EXIS3 Running man, down arrow double sided legend
- EXIS4 Running man, up arrow double sided legend

Note: Legend must be specified separately when ordering

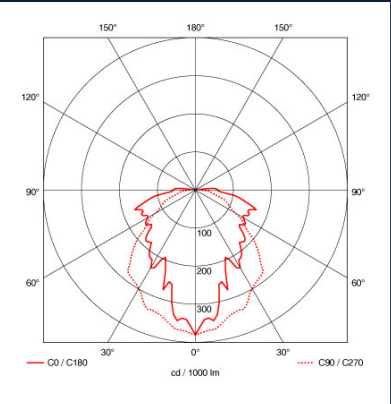

## Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,  
Park Farm Industrial Estate,  
Redditch, Worcestershire,  
B98 0HU

T. 01527 517 777  
E. [sales@tamlite.co.uk](mailto:sales@tamlite.co.uk)  
W. [tamlite.co.uk](http://tamlite.co.uk)

## Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail  
& Leisure



Sports



Urban



Warehouse  
& Logistics