

Product Name: X1 Road Lantern

General information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.

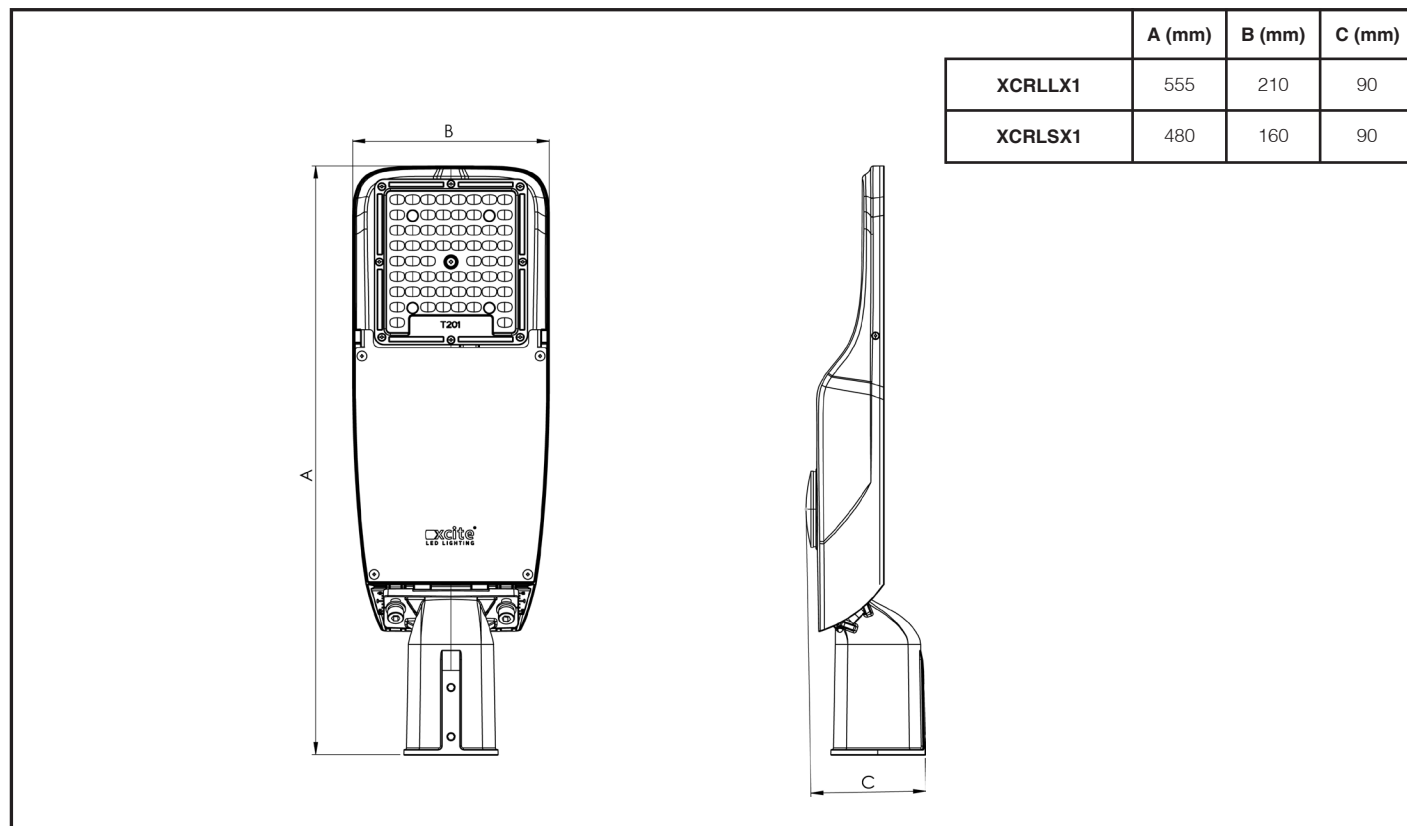


Luminaires marked with this symbol must not be covered with thermally insulating material.











This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

Dimensions




Product Name: X1 Road Lantern
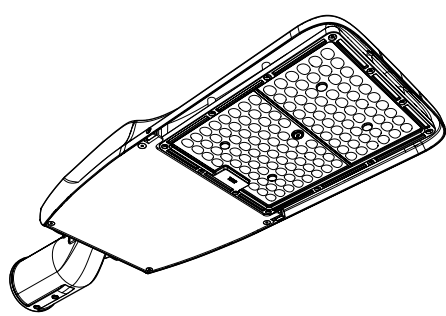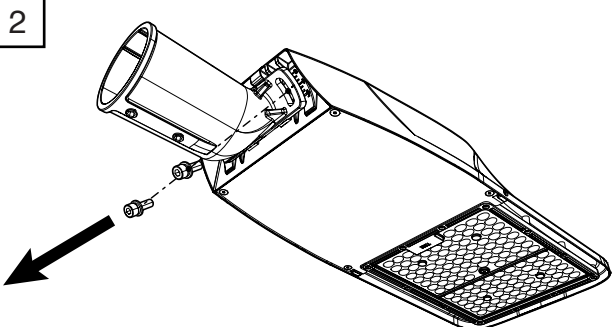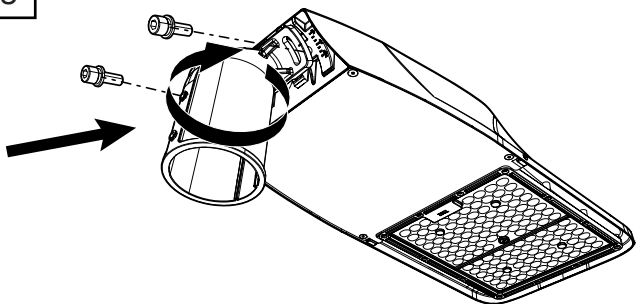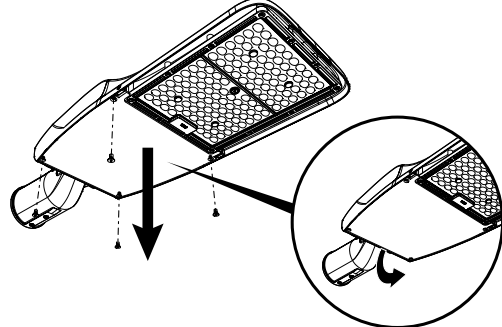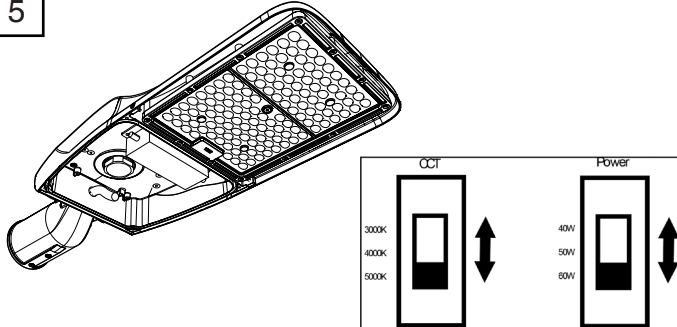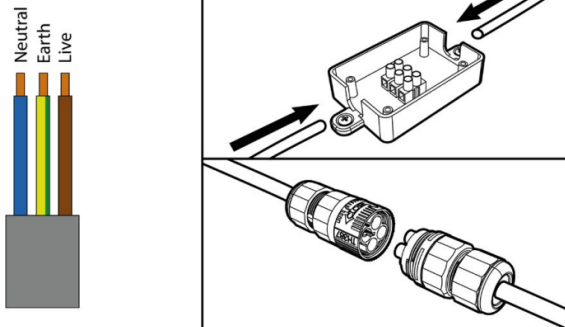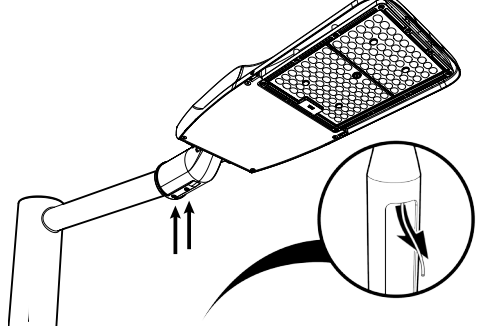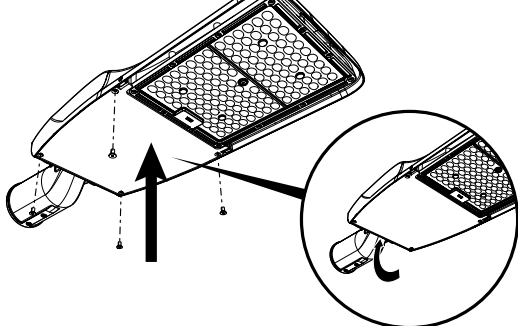
<p>1</p>  <p>Remove the product from its packaging.</p>	<p>2</p>  <p>Remove the bracket screws. (if applicable)</p>								
<p>3</p>  <p>Rotate bracket 180° as shown and secure it firmly with the screws. (if applicable)</p>	<p>4</p>  <p>Remove the screws and open the hinged lid.</p>								
<p>5</p>  <p>Select desired colour temperature and wattage. Note: power must be off</p> <table border="1" data-bbox="462 1254 774 1433"> <thead> <tr> <th>CCF</th> <th>Power</th> </tr> </thead> <tbody> <tr> <td>3000K</td> <td>40W</td> </tr> <tr> <td>4000K</td> <td>50W</td> </tr> <tr> <td>5000K</td> <td>60W</td> </tr> </tbody> </table>	CCF	Power	3000K	40W	4000K	50W	5000K	60W	<p>6</p>  <p>Extend power flex cable using a suitable IP rated connector.</p>
CCF	Power								
3000K	40W								
4000K	50W								
5000K	60W								
<p>7</p>  <p>Feed flex cable through column then position the luminaire before tightening with grub screws and connecting to mains supply as appropriate.</p>	<p>8</p>  <p>Close the lid and secure with screws.</p>								


Page 2 of 2

Tamlite Technical
Stafford Park 12,
Telford, Shropshire,
TF3 3BJ

+44(0)1952 292441
technical@tamllite.co.uk
Document No: V1



220-240V
50/60Hz



IP65

IK08

ta
0°C to 25°C