

# EM PRO



High output LED downlight for open areas and escape routes

Easy to install with simple connection wiring

Virtually service free emergency lighting



Lighting for  
**a Living**

# EM PRO



- Recessed downlight for open areas and escape routes
- Virtually service free emergency lighting
- Easy to install with simple connection wiring
- Small ceiling hole 40-43mm with 80mm height
- Very low stand-by power consumption
- Maintained and non-maintained versions

5 YR

IP20




### Recessed emergency downlight

Order Code	Description	lm	W	kg
LEDLUXR2A	2W - 6500K	200	2	0.22

### Dimensions

Order Code	C (mm)	Dia. (mm)	Cut-Out (mm)
LEDLUXR2A	80	51	40-43

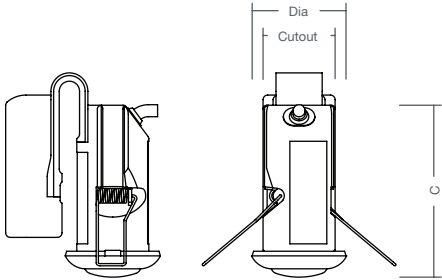

### CONSTRUCTION

- Polycarbonate body finished in white
- Supplied as standard with daylight (6500K) LED

### OPTIONS


A3	Auto self test
D3	DALI self test

### INSTALLATION NOTES

Recessed fix via fixing springs and wired via 3-way terminal box

### TO SPECIFY

Recessed emergency downlight as per TamLite EM PRO range

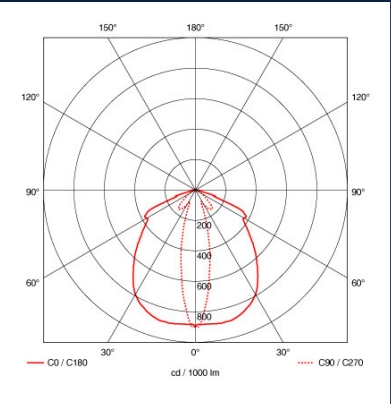

## Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,  
Park Farm Industrial Estate,  
Redditch, Worcestershire,  
B98 0HU

T. 01527 517 777  
E. [sales@tamlite.co.uk](mailto:sales@tamlite.co.uk)  
W. [tamlite.co.uk](http://tamlite.co.uk)

## Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail  
& Leisure



Sports



Urban



Warehouse  
& Logistics