

EMLUX



Virtually service free emergency lighting

Good spacing performance

High impact vandal resistant



Lighting for
a Living

EMLUX



- Virtually service free emergency lighting
- Good spacing performance
- High impact vandal resistant
- Versatile emergency bulkhead
- Slave options for central battery system
- Integrated battery charge indicator
- 30,000 hours lifetime (L70/B50)

5 YR

IP65




Emergency bulkhead

Order Code	Description	lm	W	kg
EMLM3	2W - 4000K Maintained	80	2	1.10

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
EMLM3	384	114	92

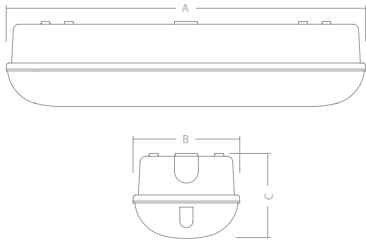

CONSTRUCTION

- Polycarbonate body and diffuser finished in white or black
- Designed for multiple cable entry for through wiring and BESA box entry
- Supplied as standard with neutral white (4000K) LED

OPTIONS

A3	Auto self test
D3	DALI self test
TS	Emergency test switch
B	Black (RAL 9005)

INSTALLATION NOTES

Wall or ceiling fix via rear-mounted fixing and cable entry


TO SPECIFY

Polycarbonate IP65 emergency bulkhead as per TamLite EMLUX range

ACCESSORIES

- EXIS1 Running man, left/right arrow double sided legend
- EXIS3 Running man, down arrow double sided legend
- EXIS4 Running man, up arrow double sided legend

Note: Legend must be specified separately when ordering

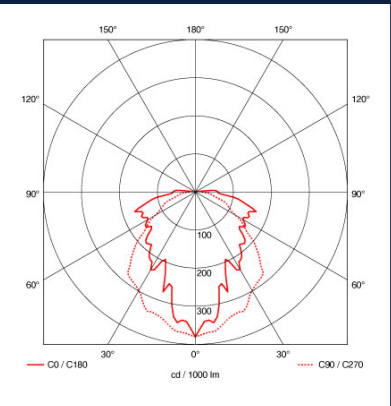

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics