



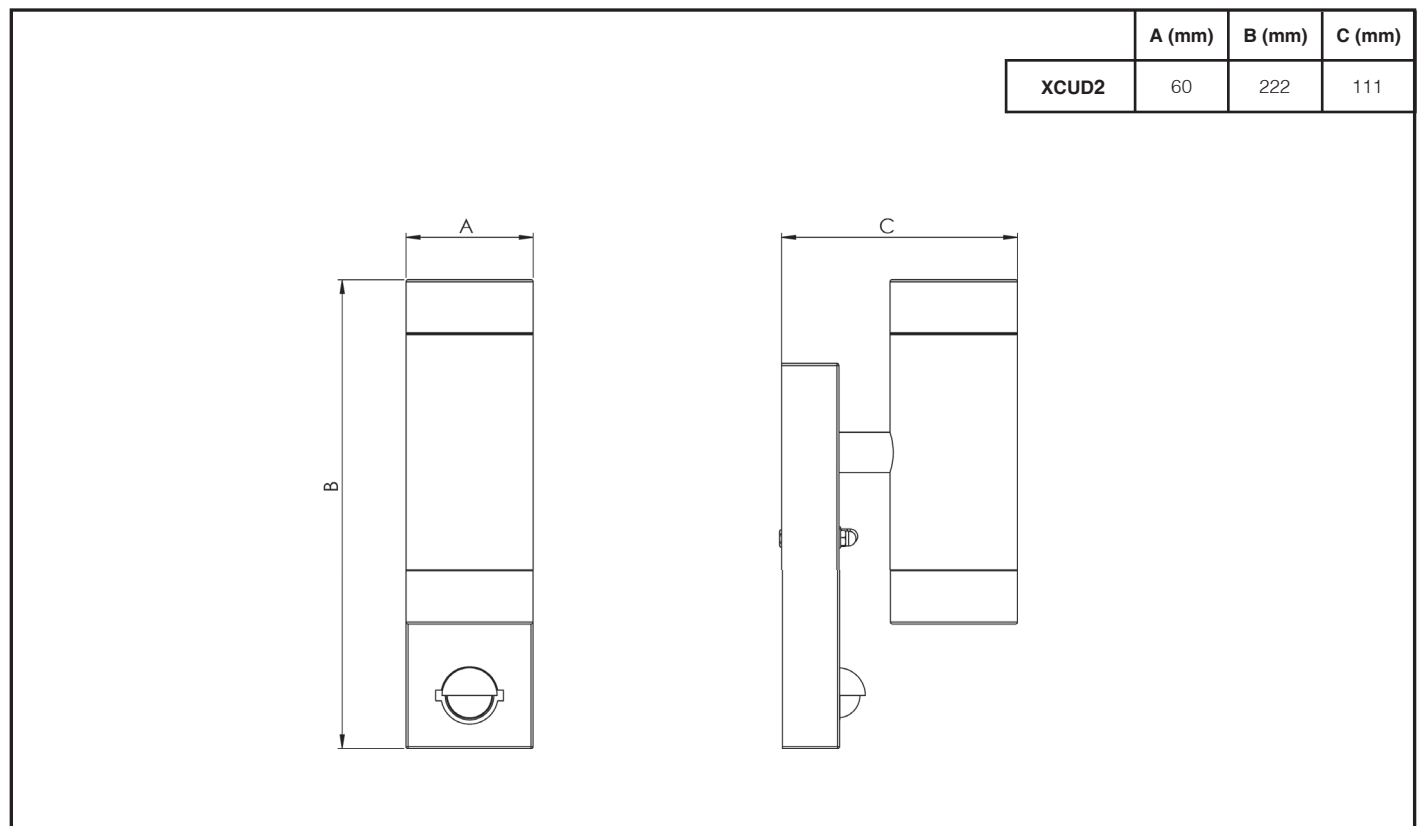
**Product Name: DECO WL PIR GU10**

## General Information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.

-  Luminaires marked with this symbol must not be covered with thermally insulating material.
-  This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

## Dimensions




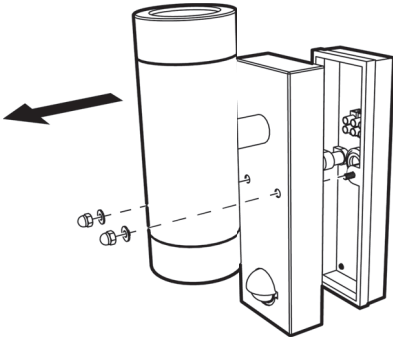

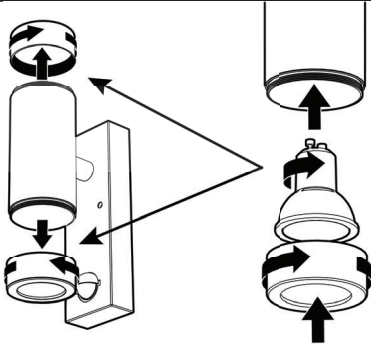

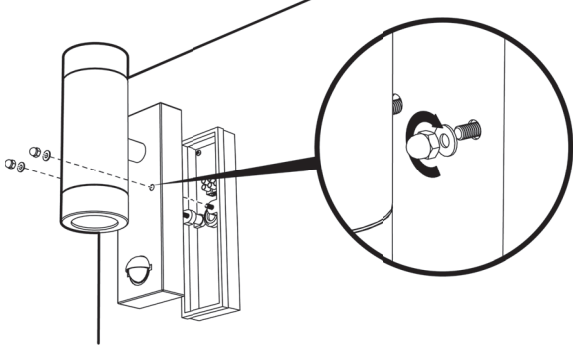
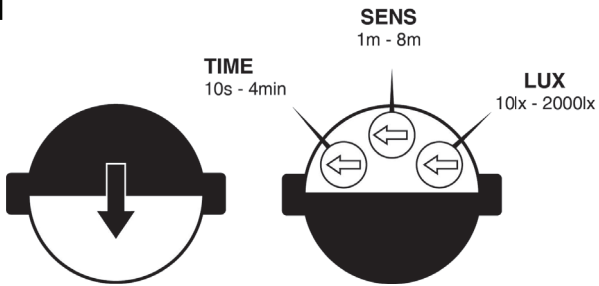
**Page 1 of 2**

Tamlite Technical  
Stafford Park 12,  
Telford, Shropshire,  
TF3 3BJ

+44(0)1952 292441  
technical@tam-lite.co.uk  
Document No: V2



**Product Name: DECO WL PIR GU10**

<p><b>1</b></p>  <p>Remove the product from its packaging.</p>	<p><b>2</b></p>  <p>Remove the two nuts to release the mounting plate.</p>
<p><b>3</b></p>  <p>Bring supply cable through mounting plate and secure with appropriate hardware.</p>	<p><b>4</b></p>  <p>Unscrew lamp covers and install 2x LED GU10 (max 20W). Re-attach lamp covers.</p>
<p><b>5</b></p>  <p>Terminate supply cable as shown.</p>	<p><b>6</b></p>  <p>Re-assemble the luminaire and tighten the two nuts.</p>
<p><b>7</b></p>  <p>Push the PIR lid down to uncover the PIR adjustment dials.</p>	<p><b>8</b></p> <p>Load - Max: 20W</p> <p><b>Lux Control</b> - The desired lux level at which the luminaire will switch on/off can be set by rotating the LUX dial.</p> <p><b>Time Control</b> - The length of time that the luminaire stays on from 10 seconds up to 4 minutes can be adjusted by rotating the TIME dial.</p> <p><b>PIR Override</b> - The sensor has a manual override function. Switch the power off and on twice within 3s period to activate the manual override. Repeat to return to PIR function</p> <p><b>Sensitivity</b> - Rotate the SENS dial to increase or decrease the distance of which movement will be picked up, from 1 to 8 meters.</p>

## Page 2 of 2

Tamlite Technical  
Stafford Park 12,  
Telford, Shropshire,  
TF3 3BJ

+44(0)1952 292441  
technical@tamlite.co.uk  
Document No: V2

