




H I L U X H X

Full range of gear options including dimmable, DALI and emergency available

Suitable for sports halls, industrial areas and warehousing

Wide beam distribution with up to 20m mounting height



LIAQA AWARD
WINNER 2017



Lighting for
a Living

HILUX HX

LOW PROFILE LED LOW BAY



5 YR

IP20



4000K

FEATURES

- > Wide beam distribution suitable for sports halls, industrial areas and warehousing up to 20m mounting height
- > Full range of gear options including dimmable, DALI and emergency available
- > CRI: Ra>80
- > Up to 117 lumens per Watt efficacy
- > 50,000 hours lifetime (L70/B50)

OPTIONS

- /V102** Fixed output PIR sensor with photocell
- /V103** Dimmable integral PIR sensor
- /HFD** Digital dimmable version
- /DALI** DALI dimming control gear
- /M3** 3 hours integrated emergency
- /WG** Wire guard for HX
- /PC** Polycarbonate cover for HX

CONSTRUCTION


- > Steel body finished in white
- > Aluminium MIRO 8510 reflector
- > Supplied as standard with neutral white (4000K) LED

TO SPECIFY ORDER

Low profile LED luminaire as per TamLite HILUX HX range

INSTALLATION NOTES

Suspension or surface mounting via fixing brackets

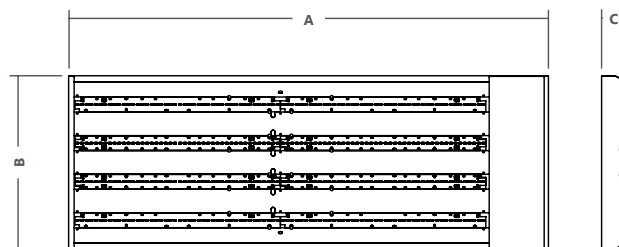


LOW PROFILE LED LOW BAY

Order Code	Description	lm	W	lm/W	A (mm)	B (mm)	C (mm)	kg
HXLED24140NW	120W - 4000K	14000	120	117	1310	265	66	4.95
HXLED34210NW	180W - 4000K	21000	180	117	1310	368	66	6.50
HXLED44280NW	240W - 4000K	28000	240	117	1310	474	66	8



WIDE BEAM DISTRIBUTION SUITABLE FOR SPORTS
HALLS, INDUSTRIAL AREAS AND WAREHOUSING

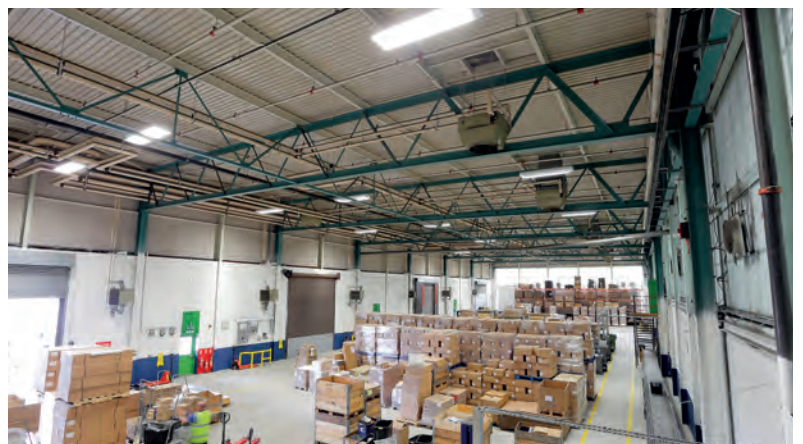

Contact Us

Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. +44 1527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

