




HORIZON COMFORT

Suitable for use in VDU areas such as offices, schools and universities

3 different outputs for low, medium or high spacing layouts

I-Tech' centre diffuser provides accurate light control



LIAQA AWARD
WINNER 2017



Lighting for
a Living

HORIZON COMFORT

RECESSED LED MODULE WITH INDIRECT/DIRECT OUTPUT



5 YR

IP20



4000K

FEATURES

- > I-Tech' centre diffuser provides accurate light control
- > Suitable for use in VDU areas such as offices, schools and universities
- > 3 different outputs for low, medium or high spacing layouts
- > Driver gear options of DALI, Emergency and Ready2Mains dimming available
- > CRI: Ra>80
- > Up to 122 lumens per Watt efficacy
- > 50,000 hours lifetime (L70/B50)

OPTIONS

- /HFD Digital dimmable version
- /DALI DALI dimming control gear
- /M3 3 hours integrated emergency
- /AST Emergency self test
- /WW Warm white (3000K)
- /CW Cool white (5000K)

CONSTRUCTION


- > Steel body finished in white (RAL 9016)
- > Opal polycarbonate diffuser
- > Supplied as standard with neutral white (4000K) LED

TO SPECIFY ORDER

Recessed indirect/direct LED module with glare control diffuser as per
Tamlite HORIZON range

INSTALLATION NOTES

Recessed lay-in for exposed 25mm ceiling grid. Frame available for
plasterboard mount

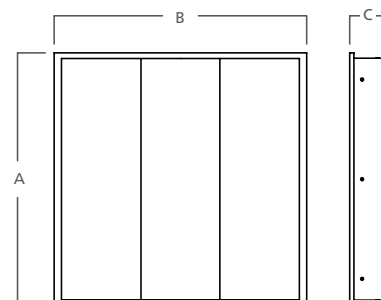

RECESSED LED MODULE WITH INDIRECT/DIRECT OUTPUT

Order Code	Description	lm	W	lm/W	A (mm)	B (mm)	C (mm)	kg
TIDO66220NW	18W - 4000K	2200	18	122	595	595	135	5.4
TIDO66300NW	25W - 4000K	3000	25	120	595	595	135	5.4
TIDO66400NW	39W - 4000K	4500	39	115	595	595	135	5.4



OFFICE - SUITABLE FOR USE IN OFFICES,
SCHOOLS AND UNIVERSITIES

QUICK-FIX
POWER ENTRY



Contact Us

Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. +44 1527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

