






# H O R I Z O N F O C U S

Suitable for use in VDU areas such as offices, schools and universities

Tamlite LG7 I-Tech diffuser optic designed for low glare applications

3 different outputs for low, medium or high spacing layouts



LIAQA AWARD  
WINNER 2017



Lighting for  
**a Living**

# HORIZON FOCUS

## RECESSED LED MODULE WITH DIRECT/INDIRECT OUTPUT



5 YR

IP20



5000K

4000K

3000K

### FEATURES

- > Tamlite LG7 I-Tech diffuser optic designed for low glare applications
- > Suitable for use in VDU areas such as offices, schools and universities
- > 3 different outputs for low, medium or high spacing layouts
- > Up to 3m x 3m spacing
- > Full range of gear options including DALI, emergency and latest Ready2Mains dimming available
- > CRI: Ra>80
- > Up to 154 lumens per Watt efficacy
- > 50,000 hours lifetime (L70/B50)

### OPTIONS

- /HFD** Digital dimmable version
- /DALI** DALI dimming control gear
- /M3** 3 hours integrated emergency
- /AST** Emergency self test
- /WW** Warm white (3000K)
- /CW** Cool white (5000K)

### CONSTRUCTION


- > Steel body finished in white (RAL 9016)
- > Plastic clear optic lens
- > Unique power entry access for easy and quick installation
- > Supplied as standard with neutral white (4000K) LED

### TO SPECIFY ORDER

Recessed indirect/direct LED module with glare control diffuser as per Tamlite HORIZON range

### INSTALLATION NOTES

Recessed lay-in for exposed 25mm ceiling grid. Frame available for plasterboard mount

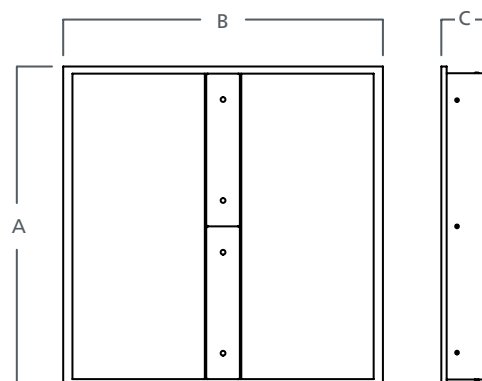

## RECESSED LED MODULE WITH DIRECT/INDIRECT OUTPUT

Order Code	Description	lm	W	lm/W	A (mm)	B (mm)	C (mm)	kg
TIDF66220NW	15W - 4000K	2200	15	147	595	595	75	5.40
TIDF66300NW	20W - 4000K	3020	20	151	595	595	75	5.40
TIDF66400NW	26W - 4000K	4000	26	154	595	595	75	5.40



SUITABLE FOR USE IN VDU AREAS SUCH AS  
OFFICES, SCHOOLS AND UNIVERSITIES



QUICK-FIX  
POWER ENTRY



# Contact Us

## Sales Centre

Tamlite Field Sales Centre,  
Park Farm Industrial Estate,  
Redditch, Worcestershire,  
B98 0HU

T. +44 1527 517 777  
E. [sales@tamlite.co.uk](mailto:sales@tamlite.co.uk)  
W. [tamlite.co.uk](http://tamlite.co.uk)

