

i3

High quality LED light source, ideal for retail applications

Fully adjustable up to 350° rotation and 45° tilt

High efficiency LED module with remote driver



Lighting for
a Living



- Suitable for retail applications
- Fully adjustable up to 350° rotation and 45° tilt
- Full range of gear options including DALI and emergency available
- CRI: Ra>80
- Up to 100 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)
- Available in TamliteCRISP, TamliteWHITE and TamliteRED (see page 104)

5 YR


IP20

Recessed adjustable downlight

Order Code	Description	lm	W	lm/W	kg
TD20MCR160NW	20W - 4000K	2000	20	100	0.95
TD20MCR250NW	30W - 4000K	3000	30	100	0.95

Dimensions

Order Code	C (mm)	Dia. (mm)	Cut-Out (mm)
TD20MCR160NW	125	155	140
TD20MCR250NW	125	155	140

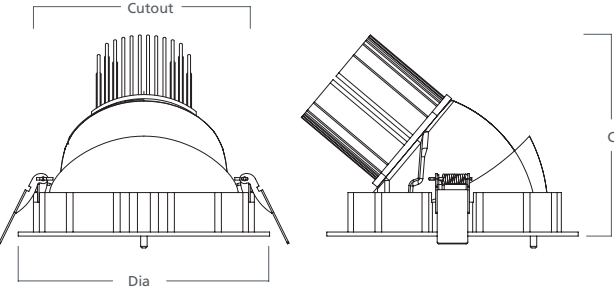

CONSTRUCTION

- Die-cast aluminium body finished in white (RAL 9010)
- Polished aluminium reflector
- Supplied as standard with neutral white (4000K) LED

OPTIONS


RM3	3 hours remote emergency
A3	Auto self test
D3	DALI self test
D	DALI dimming control gear
WW	Warm white (3000K)

INSTALLATION NOTES

Recessed into plasterboard or exposed grid ceiling via spring clips

TO SPECIFY

High output recessed downlight as per Tamlite i3 range

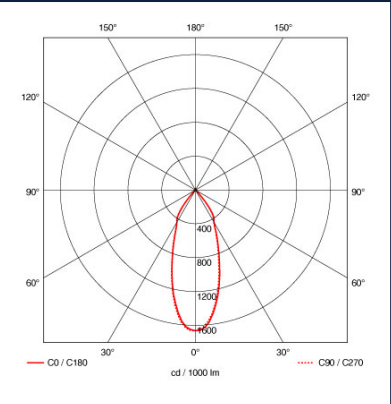

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics