

MICRO LED XL



High output batten for up to 16m mounting height
Suitable for industrial and commercial applications
Narrow beam version also available



Lighting for
a Living

MICRO LED XL



- High output batten for up to 16m mounting height
- Suitable for industrial and commercial applications
- Narrow beam version also available
- Gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 113 lumens per Watt efficacy
- 100,000 hours lifetime (L80/B10)

5 YR

IP20


TP(b)

Recessed sealed LED module

Order Code	Description	lm	W	lm/W	kg
MLEDXL5950NW	84W - 4000K - Wide beam	9500	84	113	4.2
MLEDXL51200NW	128W - 4000K - Wide beam	12000	128	94	4.2

Dimensions

Order Code	A (mm)	B (mm)	C (mm)	Cut Out
MLEDXL5950NW	1414	62	75	N/A
MLEDXL51200NW	1414	62	75	N/A



CONSTRUCTION

- Extruded aluminium body finished in white (RAL 9010)
- Polycarbonate extruded diffuser
- Pressed steel spine with clip and fix
- Polycarbonate end caps
- Integral driver
- Rear BESA fixings and cable entry
- Supplied as standard with Wide beam (80°) clear lens
- Supplied as standard with neutral white (4000K) LED

OPTIONS


M3	3 hours integrated emergency
A3	Auto self test
WW	Warm white (3000K)
CW	Cool white (5000K)
DL	Daylight (6500K)
HFR	High frequency analogue dimming
HFD	Digital dimmable version
D	Dimmable DALI
NB	Narrow beam

INSTALLATION NOTES

A range of mounting options including BESA fixing and wire suspension

TO SPECIFY

High performance extruded aluminium LED batten as per MICRO LED XL

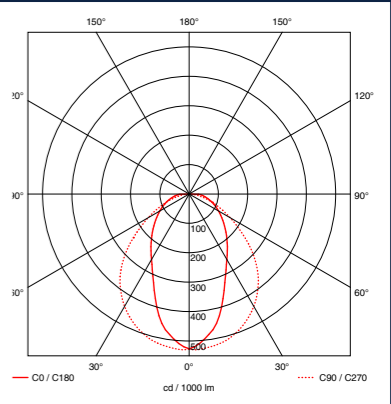

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics