

Product Name: X1 NCF CCT WS

General information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.



Luminaires marked with this symbol must not be covered with thermally insulating material.

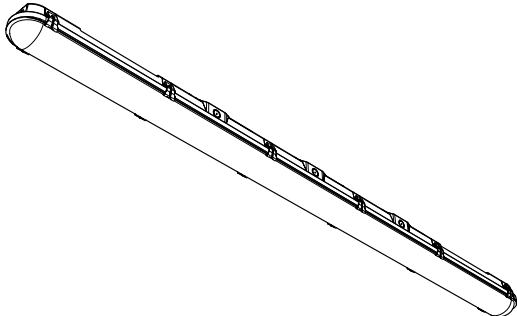
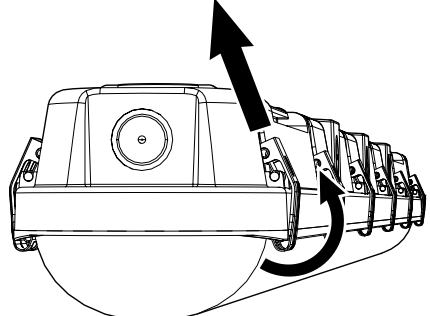
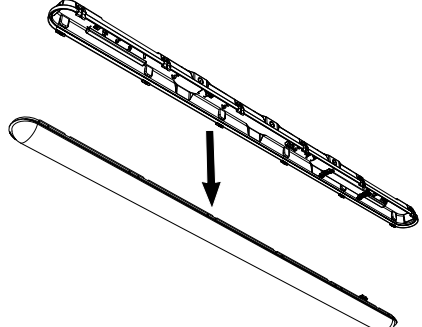
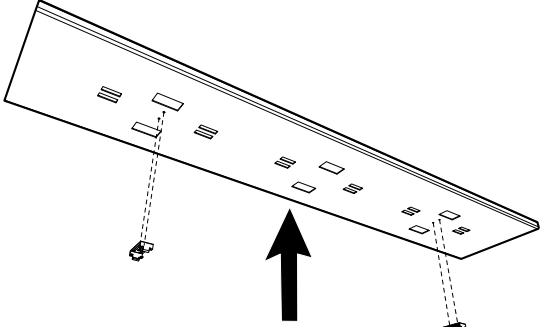
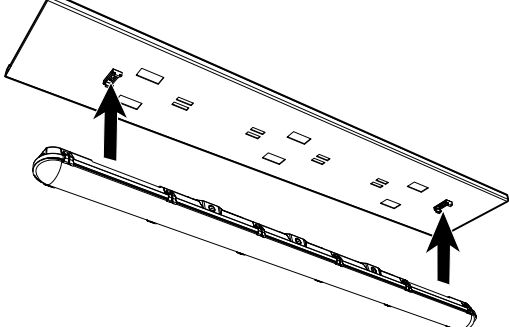
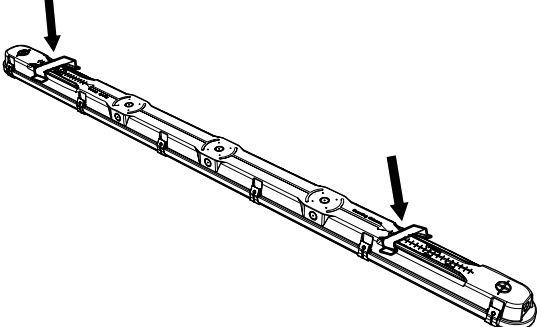
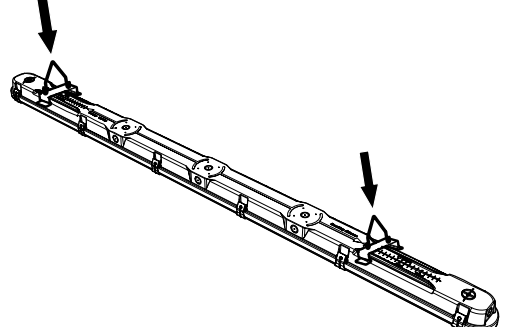
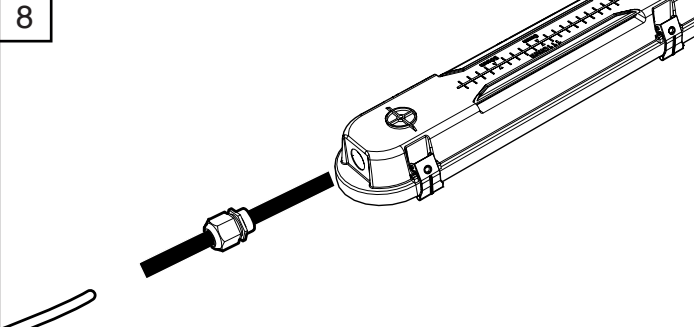


This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

Dimensions

	A (mm)	B (mm)	C (mm)
XCNC2X1	675	95	80
XCNC4X1	1275	95	80
XCNC5X1	1570	95	80
XCNC6X1	1875	95	80


Product Name: X1 NCF CCT WS

<p>1</p>  <p>Remove the product from its packaging.</p>	<p>2</p>  <p>Release buckle latches from luminaire body.</p>
<p>3</p>  <p>Remove diffuser and gear tray.</p>	<p>4</p>  <p>Mark and attach mounting brackets to mounting surface.</p>
<p>5</p>  <p>Locate luminaire mounting points on to the mounting brackets.</p>	<p>6</p>  <p>For suspended variant, push the brackets down into the mounting points.</p>
<p>7</p>  <p>Attach the spring clips onto the bracket and suspend accordingly</p>	<p>8</p>  <p>Bring incoming supply cable in to luminaire body via cable gland.</p>


Page 2 of 3

Tamlite Technical
Stafford Park 12,
Telford, Shropshire,
TF3 3BJ

+44(0)1952 292441
technical@tamlite.co.uk
Document No: V1



220-240V
50/60Hz




IP65

IK08

ta
0°C to 25°C
5°C to 25°C
for M3 variants

Product Name: X1 NCF CCT WS

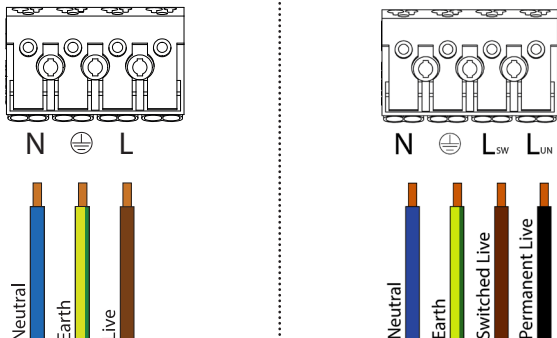9



Terminations shown for standard and emergency variants

10

COLOUR TEMPERATURE SELECTION

CW ← [Slider] → WW

WATTAGE SELECTION

Vo DC	I rated (IC)	1	2
25 - 75V	200mA	-	-
25 - 75V	250mA	-	ON
25 - 75V	300mA	ON	-
25 - 75V	350mA	ON	ON


Adjust colour temperature and wattage switches located on LED driver.

10

1			2			3			4			5			6			7			8		
On	On	100%	On	On	5s	On	On	5s	On	On	5s	On	On	5s	On	On	5s	On	On	5s	On	On	5s
-	On	75%	-	On	30s	-	On	30s	-	On	30s	-	On	30s	-	On	30s	-	On	30s	-	On	30s
On	-	50%	On	-	90s	On	-	90s	On	-	90s	On	-	90s	On	-	90s	On	-	90s	On	-	90s
-	-	25%	-	-	5min	-	-	5min	-	-	5min	-	-	5min	-	-	5min	-	-	5min	-	-	5min
			On	On	20min	On	On	20min	On	On	20min	On	On	20min	On	On	20min	On	On	20min	On	On	20min
			-	-	30min	-	-	30min	-	-	30min	-	-	30min	-	-	30min	-	-	30min	-	-	30min


Set the microwave sensor via the switches. (Variants with sensor only)

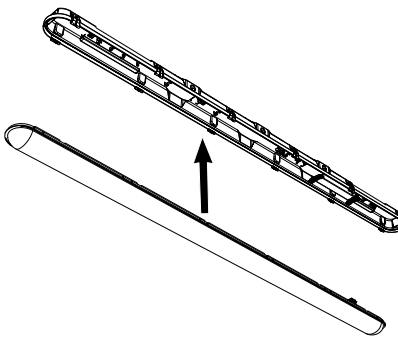12



Re-attach diffuser.

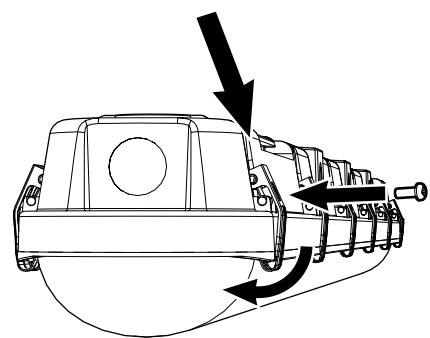13



Secure with buckle latches and 4 provided screws into each of the end buckles.

Page 3 of 3

Tamlite Technical
Stafford Park 12,
Telford, Shropshire,
TF3 3BJ

+44(0)1952 292441
technical@tamlite.co.uk
Document No: V1

