

# NIMBUS



Suitable for communal areas

Ideal for low ceiling voids

Edge-lit LED array



Lighting for  
**a Living**

# NIMBUS



- Suitable for communal areas
- Ideal for low ceiling voids
- Edge-lit LED array
- CRI: Ra>80
- Up to 114 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)



5 YR


IP20

### Recessed LED low profile downlight

Order Code	Description	lm	W	lm/W	kg
NMB80NW	10W - 4000K	800	10	80	0.22
NMB120NW	12W - 4000K	1200	12	100	0.32
NMB180NW	18W - 4000K	1800	18	100	0.51
NMB250NW	22W - 4000K	2500	22	114	0.73

### Dimensions

Order Code	C (mm)	Dia.	Cut out
NMB80NW	12.2	120	107
NMB120NW	12.2	170	156
NMB180NW	12.2	239	225
NMB250NW	12.2	300	280



### CONSTRUCTION

- Die-cast aluminium body finished in white (RAL 9016)
- Opal PMMA diffuser
- Remote driver
- Supplied as standard with neutral white (4000K) LED

### OPTIONS


D	Dimmable DALI
M3	3 hours integrated emergency
RM3	Remote maintained 3 hours emergency
WW	Warm White (3000K)

### INSTALLATION NOTES

Recessed into plasterboard or exposed grid ceiling via spring clip

### TO SPECIFY

High output recessed LED downlight as per TamLite NIMBUS range

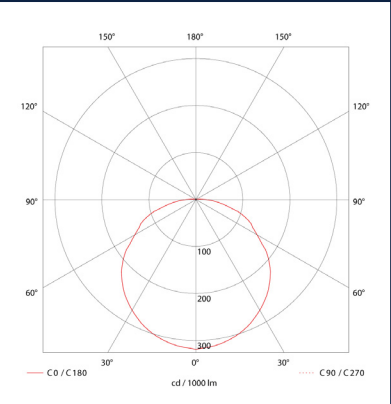

Lighting for a Living

## Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,  
Park Farm Industrial Estate,  
Redditch, Worcestershire,  
B98 0HU

T. 01527 517 777  
E. [sales@tamlite.co.uk](mailto:sales@tamlite.co.uk)  
W. [tamlite.co.uk](http://tamlite.co.uk)

## Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail  
& Leisure



Sports



Urban



Warehouse  
& Logistics