

NIMROD C



Suitable for interior and exterior applications

Available in white or black base

Full range of gear options including dimmable, DALI and emergency are available



Lighting for
a Living

NIMROD C



- Suitable for interior and exterior applications
- Available in white or black base
- Full range of gear options including dimmable, DALI and emergency are available
- CRI: Ra>80
- Up to 106 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)




Square LED bulkhead

Order Code	Description	lm	W	lm/W	kg
CNIM17LEDPNW	17W - 4000K Circular prismatic	1800	17	106	1.00
CNIM17LEDONW	17W - 4000K Circular opal	1200	17	71	1.00

Dimensions


Order Code	C (mm)	Dia.
CNIM17LEDPNW	90	285
CNIM17LEDONW	90	285

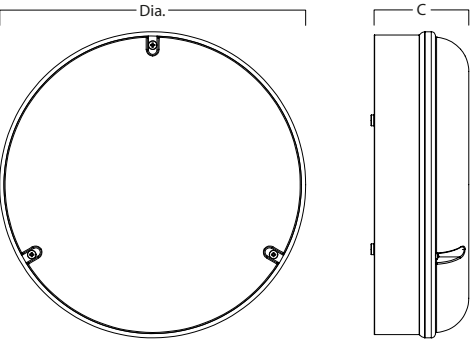

White Option



Wire Guard



CONSTRUCTION

- Polycarbonate body finished in black (RAL 9005) or white
- Supplied with neutral white (4000K) LED

OPTIONS


PC	Photocell
HFS	Microwave movement sensor
HFSD	Dimmable microwave movement sensor
D	Dimmable DALI
M3	3 hours integrated emergency
A3	Emergency self test
D3	DALI self test
B	Black (RAL 9005)
W	White

INSTALLATION NOTES

Wall or ceiling fix base mounting with rear or side cable entry and wired via rear cable entry

TO SPECIFY

LED polycarbonate IP65 bulkhead as per Tamlite NIMROD C LED range

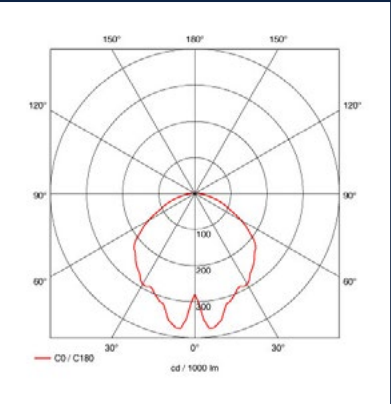

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics