

Product Name: WALLPACK CC

General Information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.

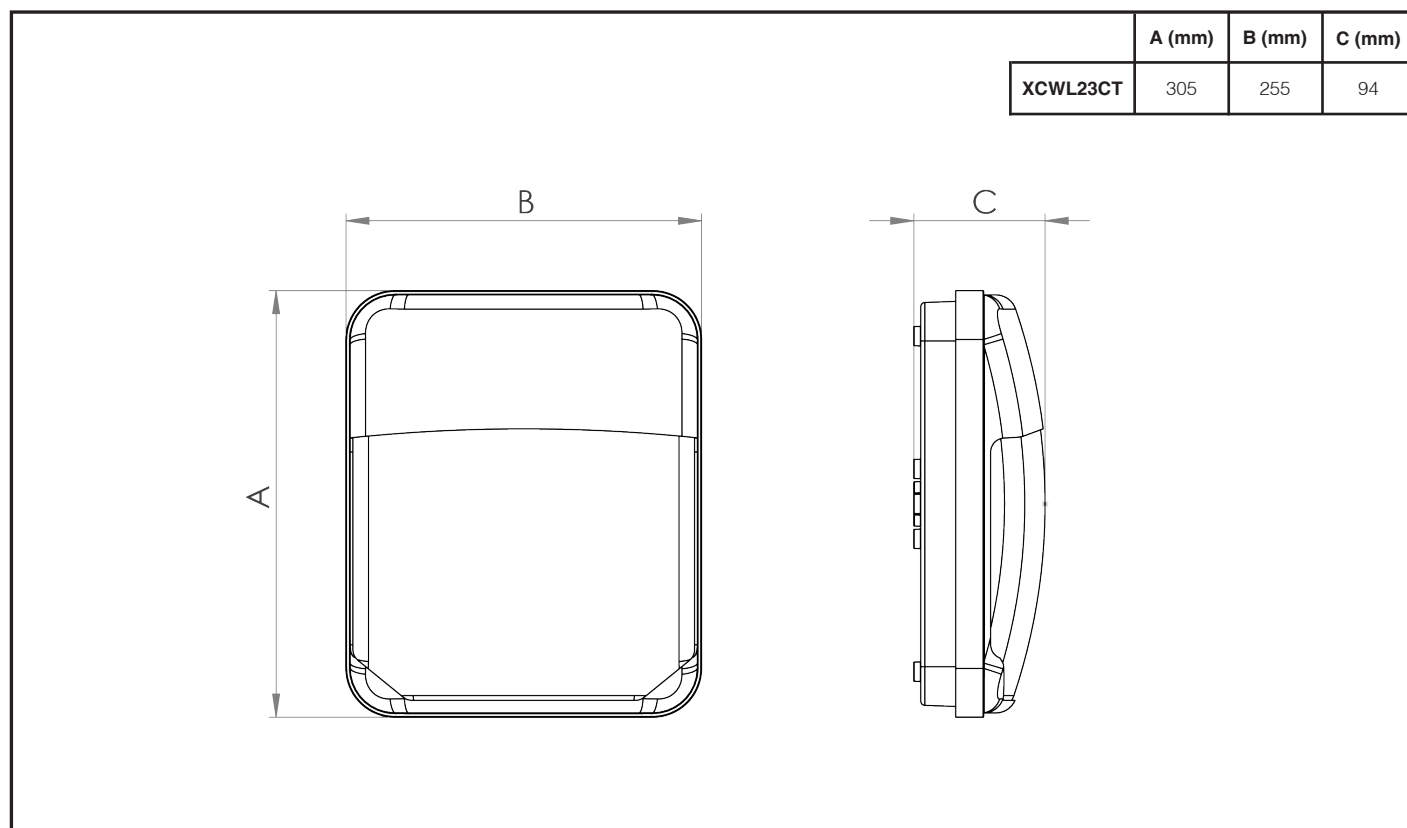


Luminaires marked with this symbol must not be covered with thermally insulating material.

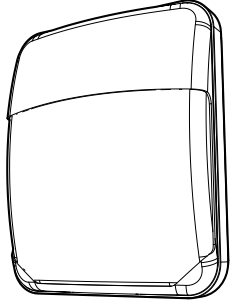
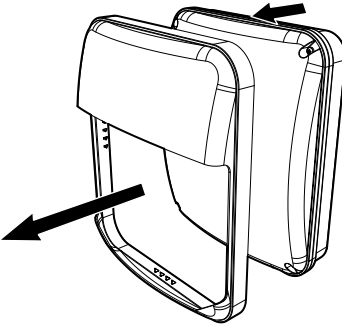
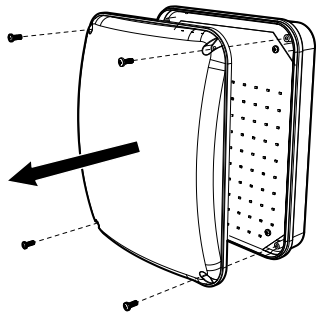
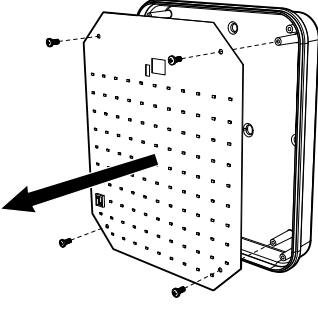
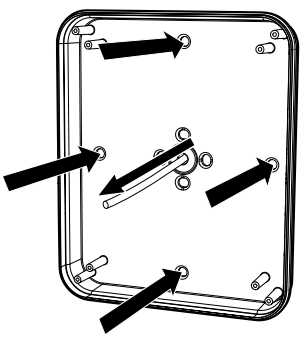
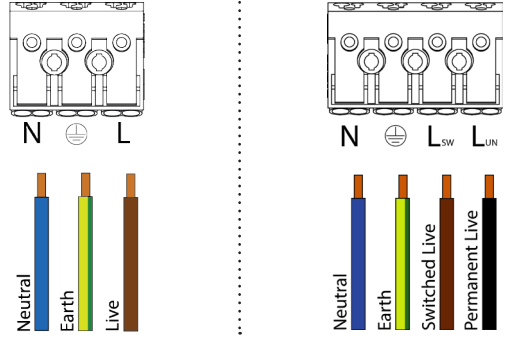
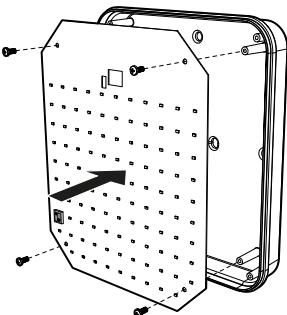
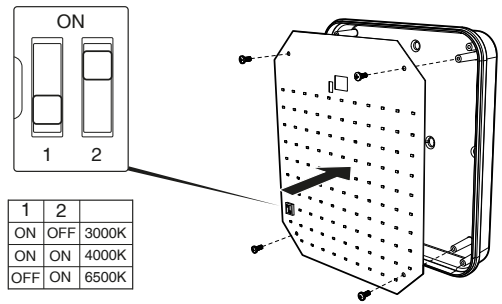


This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

Dimensions





Product Name: WALLPACK CC

<p>1</p>  <p>Remove product from all packaging.</p>	<p>2</p>  <p>Remove eyelid attachment.</p>												
<p>3</p>  <p>Remove diffuser from luminaire body.</p>	<p>4</p>  <p>Remove LED module from luminaire base.</p>												
<p>5</p>  <p>Bring supply cable through luminaire body and mount it with appropriate hardware.</p>	<p>6</p>  <p>Terminate the supply cable according to the markings on the terminal block.</p>												
<p>7</p>  <p>Re-attach LED module to luminaire base.</p>	<p>8</p>  <p>Set the CCT. Ensure the power is off before making any future adjustments.</p> <table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th></th> </tr> </thead> <tbody> <tr> <td>ON</td> <td>OFF</td> <td>3000K</td> </tr> <tr> <td>ON</td> <td>ON</td> <td>4000K</td> </tr> <tr> <td>OFF</td> <td>ON</td> <td>6500K</td> </tr> </tbody> </table>	1	2		ON	OFF	3000K	ON	ON	4000K	OFF	ON	6500K
1	2												
ON	OFF	3000K											
ON	ON	4000K											
OFF	ON	6500K											

Page 2 of 3

Tamlite Technical
Stafford Park 12,
Telford, Shropshire,
TF3 3BJ

+44(0)1952 292441
technical@tamlite.co.uk
Document No: V1



Product Name: WALLPACK CC

9

If applicable, set the microwave sensor via the dip-switches

10

Re-attach the diffuser and eyelid attachment.

11

1. Sensitivity
Sensitivity can be adjusted by selecting the combination on the DIP switches for different applications.

2. Hold-time
Hold-time refers to the time period that the lights remains 100% on if no more movement is detected.

3. Daylight threshold
Different daylight threshold can be preset on DIP switches. Light will always turn on upon movement if daylight sensor is disabled.

I – 100%		<table border="1"> <tr><td></td><td>1</td><td>2</td><td></td></tr> <tr><td>I</td><td>●</td><td>●</td><td>100%</td></tr> <tr><td>II</td><td>●</td><td>○</td><td>75%</td></tr> <tr><td>III</td><td>○</td><td>●</td><td>50%</td></tr> <tr><td>IV</td><td>○</td><td>○</td><td>10%</td></tr> </table>		1	2		I	●	●	100%	II	●	○	75%	III	○	●	50%	IV	○	○	10%
		1	2																			
I		●	●	100%																		
II		●	○	75%																		
III	○	●	50%																			
IV	○	○	10%																			
II – 75%																						
III – 50%																						
IV – 10%																						

I – 5s		<table border="1"> <tr><td></td><td>3</td><td>4</td><td></td></tr> <tr><td>I</td><td>●</td><td>●</td><td>5s</td></tr> <tr><td>II</td><td>●</td><td>○</td><td>90s</td></tr> <tr><td>III</td><td>○</td><td>●</td><td>5min</td></tr> <tr><td>IV</td><td>○</td><td>○</td><td>15min</td></tr> </table>		3	4		I	●	●	5s	II	●	○	90s	III	○	●	5min	IV	○	○	15min
		3	4																			
I		●	●	5s																		
II		●	○	90s																		
III	○	●	5min																			
IV	○	○	15min																			
II – 90s																						
III – 5min																						
IV – 15min																						

I – Disable		<table border="1"> <tr><td></td><td>5</td><td>6</td><td></td></tr> <tr><td>I</td><td>●</td><td>●</td><td>Disable</td></tr> <tr><td>II</td><td>●</td><td>○</td><td>50Lux</td></tr> <tr><td>III</td><td>○</td><td>●</td><td>10Lux</td></tr> <tr><td>IV</td><td>○</td><td>○</td><td>2Lux</td></tr> </table>		5	6		I	●	●	Disable	II	●	○	50Lux	III	○	●	10Lux	IV	○	○	2Lux
		5	6																			
I		●	●	Disable																		
II		●	○	50Lux																		
III	○	●	10Lux																			
IV	○	○	2Lux																			
II – 50Lux																						
III – 10Lux																						
IV – 2Lux																						

Note: Eyelid attachment may affect daylight threshold settings.