

SAPPHIRE



High lumen output suitable for 5-8m mounting heights

Decorative LED pendant for open areas and atriums

Integral emergency version also available



Lighting for
a Living

SAPPHIRE



- Decorative pendant suitable for open areas and atriums
- Ideal for 5-8m mounting heights
- Full range of gear options including DALI and emergency are available
- CRI: Ra>80
- Up to 87 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)




High output pendant

Order Code	Description	lm	W	lm/W	kg
TSP470NW	47W - 4000K	4100	47	87	3.70

Dimensions

Order Code	C (mm)	Dia.
TSP470NW	635	405

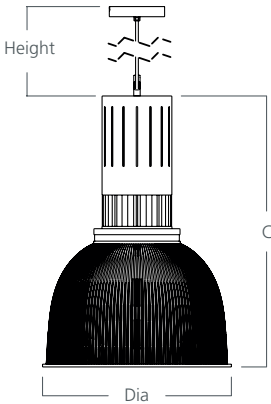

CONSTRUCTION

- Die-cast aluminium body with heat sink finished in silver (RAL 9022)
- Prismatic polycarbonate refractor
- Supplied with ceiling fixing plate and 2.0m of cable and wire suspension
- Supplied as standard with neutral white (4000K) LED

OPTIONS


M3	3 hours integrated emergency
A3	Auto self test
D3	DALI self test
D	DALI dimming control gear

INSTALLATION NOTES

Suspended via 2.0m wire to ceiling fixing bracket with 2.0m black cable

TO SPECIFY

Decorative pendant as per TamLite SAPPHIRE range, supplied with gear and module

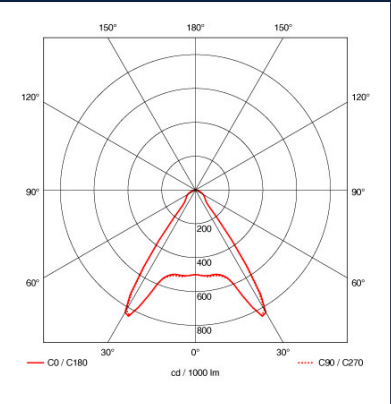

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics