

SAPPHIRE XL



High output pendant with prismatic refractor

Ideal for large retail or public areas up to 12m mounting height

Up to 130 lumens per Watt efficacy



Lighting for
a Living

SAPPHIRE XL



- High output pendant with prismatic refractor
- Ideal for large retail or public areas up to 12m mounting height
- Up to 130 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

5 YR

IP65



High output decorative pendant for retail areas

Order Code	Description	lm	W	lm/W	kg
SPXP1300NWW	100W - 4000K - Decorative pendant	13000	100	130	4.48
SPXP1900NWW	150W - 4000K - Decorative pendant	19000	150	127	4.48

Dimensions

Order Code	C (mm)	Dia.
SPXP1300NWW	365	412
SPXP1900NWW	365	412

CONSTRUCTION



- Die-cast aluminium body
- Clear polycarbonate lens
- Integral driver

INSTALLATION NOTES

Fixed via 20mm hook and supplied with 1.5m Flex

TO SPECIFY

High output decorative pendant as per TamLite SAPPHIRE XL range

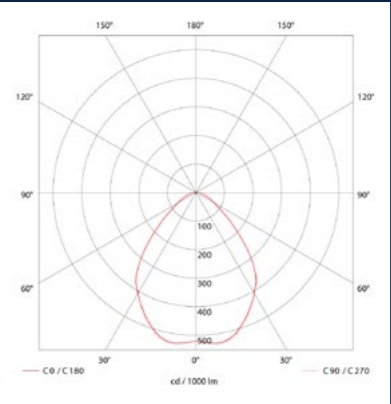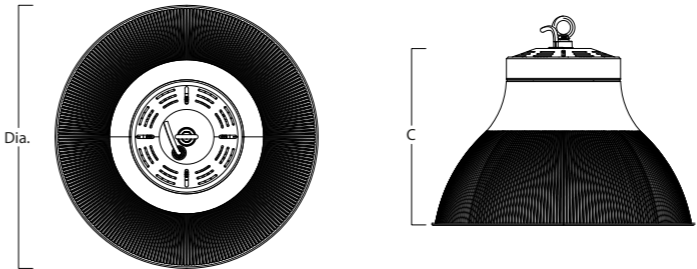

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics