

# HORIZON COMFORT S



Suitable for office installations and general or task area lighting

Tamlite I-Tech diffuser designed for low glare reduction to BS EN-12464 compliance

3 different outputs for low, medium or high spacing layouts



Lighting for  
**a Living**

# HORIZON COMFORT S



- Conduit entry for through wiring
- Virtually service free emergency lighting
- IP65 weatherproof rating
- 30,000 hours lifetime (L70/B50)

5 YR

IP20

IK04


TP(a)

Recessed LED low profile downlight

Order Code	Description	lm	W	lm/W	kg
HRCS66220NW	18W - 4000K	2200	18	122	9.47
HRCS66300NW	23W - 4000K	3000	23	130	9.47
HRCS66450NW	36W - 4000K	4500	36	125	9.47

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
HRCS66220NW	625	625	90
HRCS66300NW	625	625	90
HRCS66450NW	625	625	90

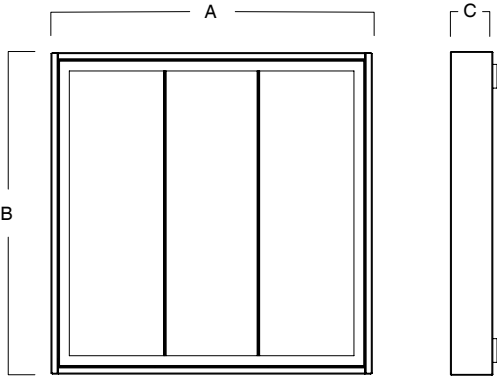

CONSTRUCTION


- Polycarbonate body finished in white (RAL 9006)
- Integral driver
- Supplied as standard with neutral white (4000K) LED

INSTALLATION NOTES

Surface fix to ceiling via 4 corner mount 20mm dia. fixing holes and wired via 3 pole terminal block

TO SPECIFY

Surface indirect/direct LED module with glare control diffuser as per TamLite HORIZON COMFORT S range

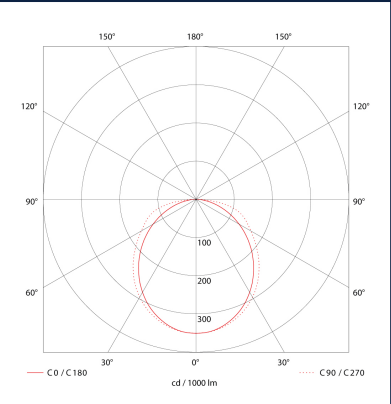

Lighting for a Living

## Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,  
Park Farm Industrial Estate,  
Redditch, Worcestershire,  
B98 0HU

T. 01527 517 777  
E. [sales@tamlite.co.uk](mailto:sales@tamlite.co.uk)  
W. [tamlite.co.uk](http://tamlite.co.uk)

## Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail  
& Leisure



Sports



Urban



Warehouse  
& Logistics