

TAURUS



High performance optic for maximum spacing and distribution

Maximum of 15 metre spacing, at 3 metre mounting height

Dark sky optic to reduce upward light output with less than 2% ULOR



Lighting for
a Living

TAURUS



- High performance optic for maximum spacing and distribution
- Maximum of 15 metre spacing, at 3 metre mounting height
- Dark sky optic to reduce upward light output with less than 2% ULOR
- Choice of 3 lumen outputs
- Up to 138 lumens per Watt efficacy
- 50,000 hours lifetime (L80/B20)



5 YR


IP65

High output wall light

Order Code	Description	lm	W	lm/W	kg
TAU80NW	6W - 4000K	800	6	133	3.20
TAU180NW	13W - 4000K	1800	13	138	3.20
TAU300NW	24W- 4000K	3000	24	125	3.20

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
TAU80NW	295	220	165
TAU180NW	295	220	165
TAU300NW	295	220	165

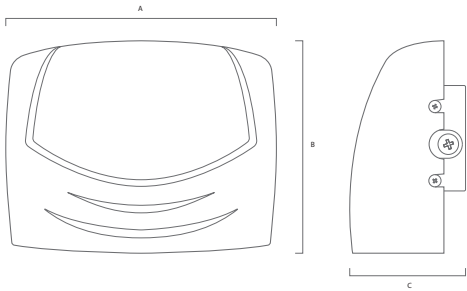

Black Option



CONSTRUCTION


- Die-cast aluminium body finished in grey (RAL 9006)
- Integral driver
- Supplied as standard with neutral white (4000K) LED

INSTALLATION NOTES

Fixed via rear mounting plate and wired via cable entry

TO SPECIFY

Die-cast aluminium wall light as per TamLite TAURUS range

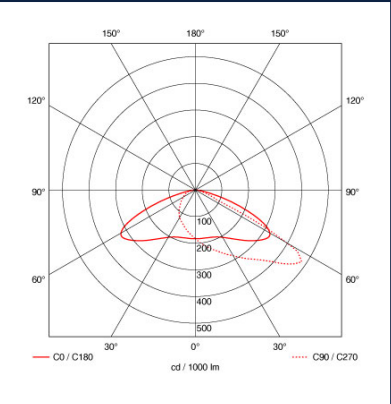

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics