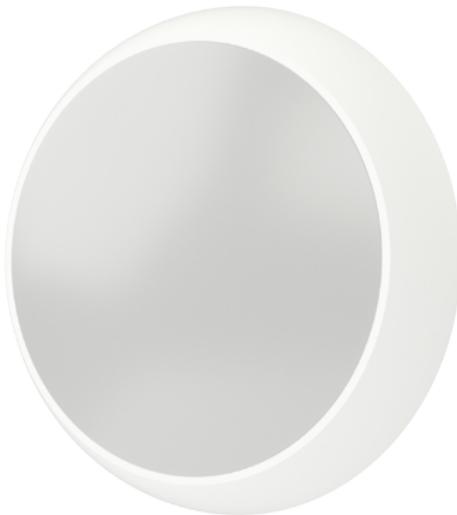


Order Code: XCBHX1M3MS

[3000K/4000K/6000K] + Wattage Selectable - Emergency - Microwave sensor

**Technical Data****General**

Luminaire Wattage (W)	8W/12W/16W
Weight (kg)	1.47
Operating Temperature (ta °C)	5° to 25°

Light Output

Lumens (lm)	1000 to 1900
Efficacy (lm/W)	130

LED

CRI	80
Macadam Ellipses	1.5 to 9.1

Driver

Driver Current (mA)	140 to 215 to 280
Forward Voltage (V)	47.6 to 50

Emergency

Emergency Lumen Operating	135
Emergency Wattage (W)	2

Features

- Suitable for most domestic and commercial applications
- CCT [3000K/4000K/6000K] adjustable via 3-way selector switch
- Wattage [8W,12W,16W] adjustable via 3-way selector switch
- Twist On/Off diffuser with screwlock suitable for public spaces
- Hinged gear tray for quick and easy installation

Construction

- Manufactured from durable thermoplastic materials
- Modular emergency and microwave sensor's available for quick and easy conversion of a standard fitting
- For additional control, please use X1 Bulkhead Remote [Sold Separately]
- Pre-assembled emergency and sensor luminaires available

Installation Notes

Conduit side entry points for surface mount cable entry
Loop in/out push-fit terminal block for quick installation

Order Code: XCBHX1M3MS

[3000K/4000K/6000K] + Wattage Selectable - Emergency - Microwave sensor

Dimensions

C (mm)	85
Dia. (mm)	320

Line Drawing

