

Product Name: XCITE RGB LED STRIP KIT

General information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.



Luminaires marked with this symbol must not be covered with thermally insulating material.



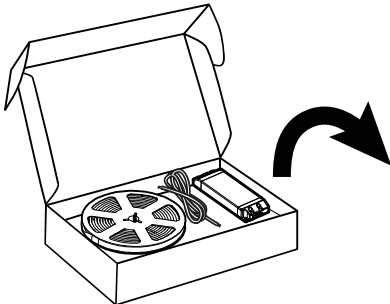
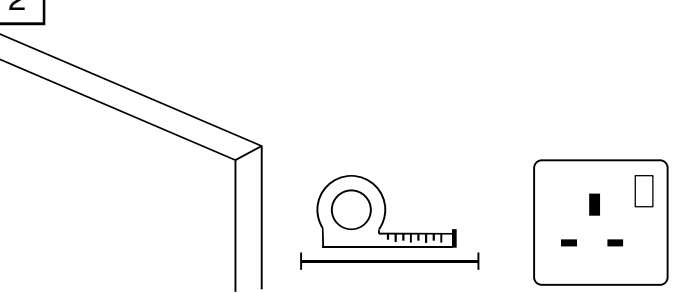
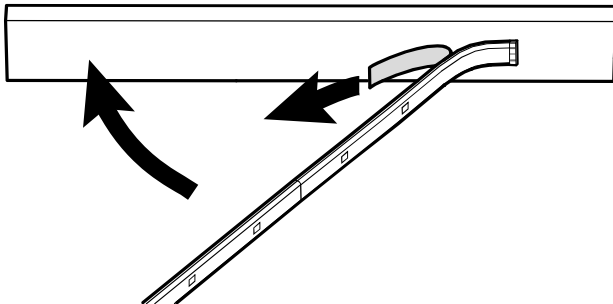
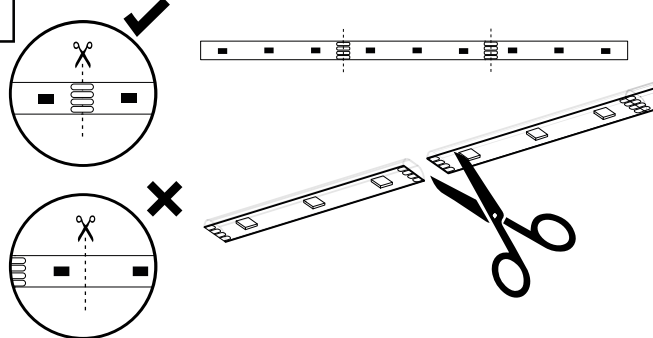
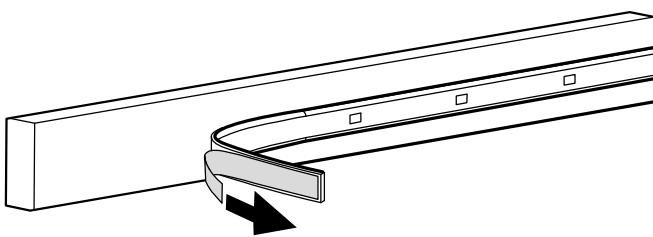
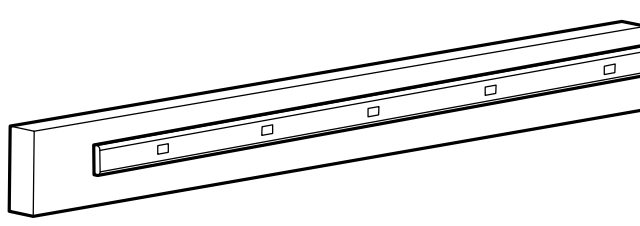
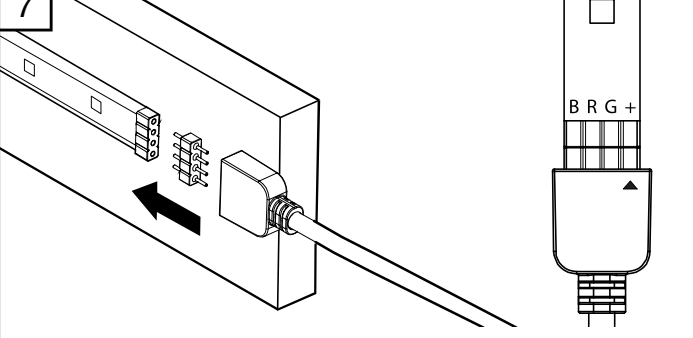
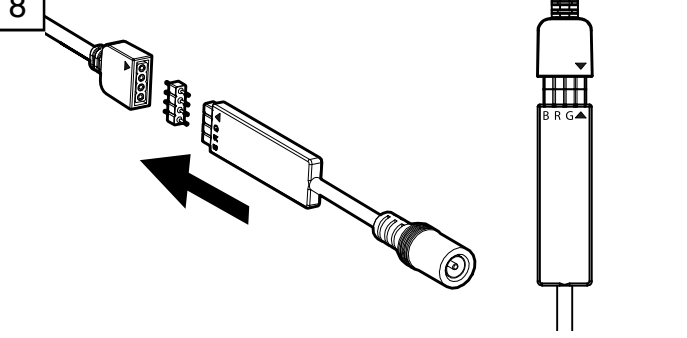
This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

Dimensions

	A (mm)	B (mm)	C (mm)
XCSK65RGB	5000	10	1740

	A	B	C	D	E	F
A	5M Strip	x1				
B	Power adapter	x1				
C	0.5M 4 pin wire	x1				
D	4 pin wire connector	x2				
E	RGB Controller	x1				
F	RGB Remote	x1				


Product Name: XCITE RGB LED STRIP KIT

<p>1</p>  <p>Remove the product from its packaging.</p>	<p>2</p>  <p>Ensure a mains supply socket is within proximity of the install position.</p>
<p>3</p>  <p>Remove backing paper and attach LED strip to a clean, flat and dry surface.</p>	<p>4</p>  <p>The strip can be cut to length at 50mm intervals at the indicated position.</p>
<p>5</p>  <p>Continue to remove the backing paper and install the strip.</p>	<p>6</p>  <p>Ensure good contact with the mounting surface.</p>
<p>7</p>  <p>Connect the strip to the interconnecting lead and observe "Triangle" to "+"</p>	<p>8</p>  <p>Connect the controller to the lead and observe "Triangle" to "Triangle"</p>

Page 2 of 3


Tamlite Technical
Stafford Park 12,
Telford, Shropshire,
TF3 3BJ

+44(0)1952 292441
technical@tamlite.co.uk
Document No: V1




Product Name: RGB STRIP KIT - BASIC

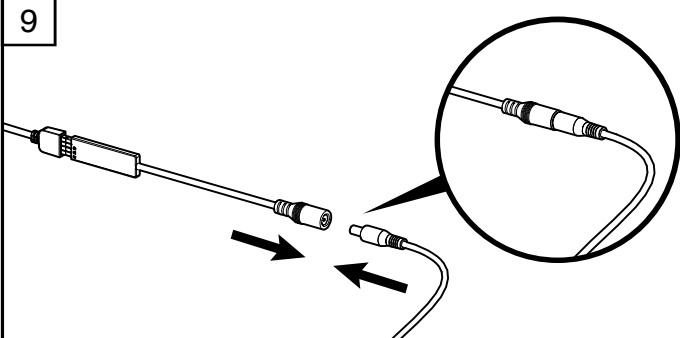9




Connect the controller to the plug in power supply.

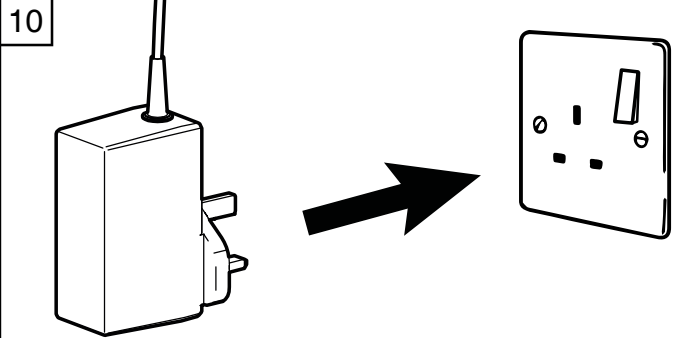10





Plug the power supply in to the wall socket.

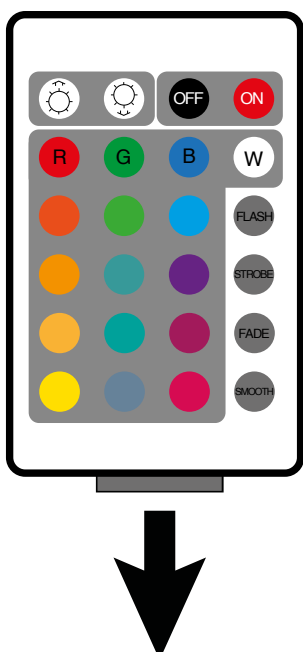11



Turn ON/OFF:
Press the 'ON' button to turn the light on, or press the 'OFF' button to turn the light off.

RGB (red/green/blue) colour selection:
The desired colour can be selected by pressing the corresponding printed button i.e. Blue button for Blue light.

Brightness control:
To change the brightness of the light press the  button to increase or the  button to decrease the intensity.

Dynamic mode:
The dynamic option can be switched on by pressing the 'FLASH', 'STROBE', 'SMOOTH' or 'FADE' button. The colours will automatically change in a programmed tempo. To switch off the dynamic mode press any colour button.

Remove the plastic tab from the handset to enable operation.