


NON CORROSIVE



4000K

5YRS
WARRANTY

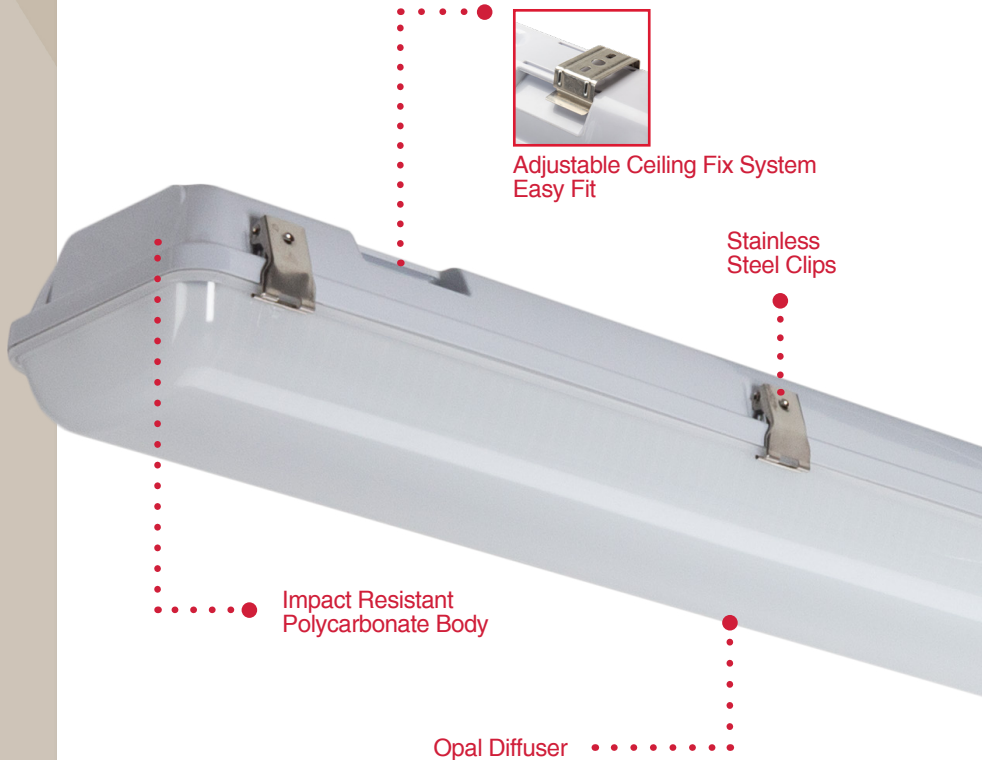

IP65

IK08

M3





- Ideal for replacement of linear fluorescent fixtures
- Available in 3 lengths
- Grey polycarbonate body
- Supplied with opal diffuser
- Microwave movement sensor available
- Integral emergency option available
- Stainless steel fixing clips
- CRI: Ra>80
- Supplied as standard with neutral white [4000K] LED
- Up to 130 lumens per Watt efficacy

Order Code	Description	W	lm	lm/W
XCNC14NW	24W - 1200mm Non Corrosive IP65 - 4000K	22	3000	136
XCNC14HENW	34W - 1200mm Non Corrosive IP65 - 4000K	32	5000	156
XCNC24NW	48W - 1200mm Non Corrosive IP65 - 4000K	42	5100	121
XCNC15NW	34W - 1500mm Non Corrosive IP65 - 4000K	32	4600	144
XCNC15HENW	54W - 1500mm Non Corrosive IP65 - 4000K	51	7000	137
XCNC25NW	68W - 1500mm Non Corrosive IP65 - 4000K	65	8000	123
XCNC16NW	39W - 1800mm Non Corrosive IP65 - 4000K	38	4500	118
XCNC16HENW	61W - 1800mm Non Corrosive IP65 - 4000K	63	8800	140
XCNC26NW	79W - 1800mm Non Corrosive IP65 - 4000K	77	9500	123

T: +44 1527 517 777
W: xciteledlighting.co.uk
E: sales@xciteledlighting.co.uk

xcite[®]
LED LIGHTING