


### Order Code: XCBT2X1P

X1 Batten - 600mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Batten fit PIR

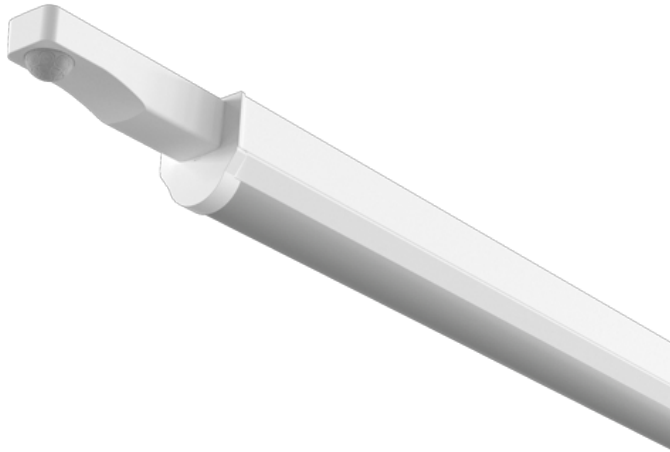

#### Features

- Ideal for replacement of linear fluorescent fixtures
- Suitable for general domestic and commercial use
- CCT selectable via selector switch [3000K/4000K/6000K]
- Batten fit PIR option available, compatible with [V2P Remote](#)

#### Construction

- Slimline steel body finished in white (RAL 9016)
- High quality opal diffuser to reduce glare
- Loop in/out mains connector
- Conduit and BESA fixing points for end or rear cable entry
- Factory presets set at:  
10 minute off delay  
Lux disabled

#### Installation Notes

Centrally-mounted loop-in, loop-out push fit terminal block



#### Technical Data

| General                       |                       | Electrical                |                    |
|-------------------------------|-----------------------|---------------------------|--------------------|
| Luminaire Wattage (W)         | 11W/13W/15W/18W       | Rated Input Current (A)   | 0.09               |
| Weight (kg)                   | 0.78                  | Power Factor (pf)         | 0.83 to 0.92       |
| Operating Temperature (ta °C) | 45                    | Input Voltage Range (VAC) | 220 to 240         |
|                               |                       | Inrush Current Peak (A)   | 175                |
| Light Output                  |                       | Surge Protection (kV)     | L-N 1KV, LN-PG 2KV |
| Lumens (lm)                   | 1300 to 2300          | Conductor Size (mm)       | 0.5 to 2.5         |
| Efficacy (lm/W)               | 132                   | Terminal Type             | 3 pole piano key   |
| LED                           |                       |                           |                    |
| CCT (K)                       | 3000K/4000K/6000K     |                           |                    |
| CRI                           | 85                    |                           |                    |
| Macadam Elipses               | 5                     |                           |                    |
| Driver                        |                       |                           |                    |
| Driver Current (mA)           | 200 , 250 , 300 , 350 |                           |                    |
| Forward Voltage (V)           | 25 to 57              |                           |                    |
| Emergency                     |                       |                           |                    |
| Emergency Lumen Operating     | 264                   |                           |                    |
| Emergency Wattage (W)         | 2                     |                           |                    |

**Order Code: XCBT2X1P**

X1 Batten - 600mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Batten fit PIR

Dimensions

|        |     |
|--------|-----|
| A (mm) | 721 |
| -----  |     |
| B (mm) | 55  |
| -----  |     |
| C (mm) | 58  |
| -----  |     |

Line Drawing

