


### Order Code: XCBT4X1M3

X1 Batten - 1200mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency

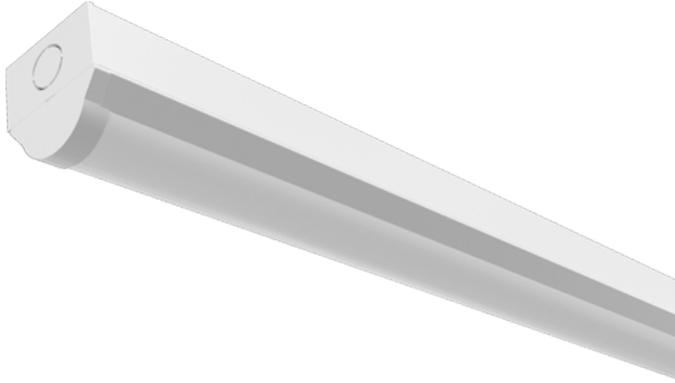

#### Features

- Ideal for replacement of linear fluorescent fixtures
- Suitable for general domestic and commercial use
- CCT selectable via selector switch [3000K/4000K/6000K]
- Wattage selectable via 2-way dip switch [20W/25W/30W/35W]
- Batten fit PIR option available, compatible with [V2P Remote](#)

#### Construction

- Slimline steel body finished in white (RAL 9016)
- High quality opal diffuser to reduce glare
- Loop in/out mains connector
- Conduit and BESA fixing points for end or rear cable entry

#### Installation Notes

Centrally-mounted loop-in, loop-out push fit terminal block



#### Technical Data

| General                       |                       | Electrical                |                    |
|-------------------------------|-----------------------|---------------------------|--------------------|
| Luminaire Wattage (W)         | 20W/25W/30W/35W       | Rated Input Current (A)   | 0.16               |
| Weight (kg)                   | 1.71                  | Power Factor (pf)         | 0.91 to 0.96       |
| Operating Temperature (ta °C) | 45                    | Input Voltage Range (VAC) | 220 to 240         |
|                               |                       | Inrush Current Peak (A)   | 190                |
|                               |                       | Surge Protection (kV)     | L-N 1KV, LN-PG 2KV |
|                               |                       | Conductor Size (mm)       | 0.5 to 2.5         |
|                               |                       | Terminal Type             | 4 pole piano key   |
| Light Output                  |                       |                           |                    |
| Lumens (lm)                   | 2750 to 4900          |                           |                    |
| Efficacy (lm/W)               | 146                   |                           |                    |
| LED                           |                       |                           |                    |
| CCT (K)                       | 3000K/4000K/6000K     |                           |                    |
| CRI                           | 85                    |                           |                    |
| Macadam Elipses               | 5                     |                           |                    |
| Driver                        |                       |                           |                    |
| Driver Current (mA)           | 200 , 250 , 300 , 350 |                           |                    |
| Forward Voltage (V)           | 40 to 115             |                           |                    |
| Emergency                     |                       |                           |                    |
| Emergency Lumen Operating     | 293                   |                           |                    |
| Emergency Wattage (W)         | 2                     |                           |                    |

**Order Code: XCBT4X1M3**

X1 Batten - 1200mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency

Dimensions

|        |      |
|--------|------|
| A (mm) | 1200 |
| B (mm) | 55   |
| C (mm) | 58   |
| Fix    | 610  |

Line Drawing

