
xcite LED Lighting

Data Sheet



Order Code: XCBT6X1

X1 Batten - 1800mm - CCT [3000K/4000K/6000K] + Wattage Selectable

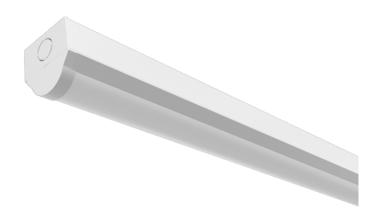

Features

- · Ideal for replacement of linear fluorescent fixtures
- Suitable for general domestic and commercial use
- CCT [3000K/4000K/6000K] adjustable via 3-way selector switch
- Wattage [34W/42W/51W/60W] adjustable via 2-way dip switch

Construction

- Slimline steel body finished in white (RAL 9016)
- High quality opal diffuser to reduce glare
- Integral emergency option available
- · Loop in/out mains connector
- Conduit and BESA fixing points for end or rear cable entry

Installation Notes

Centrally-mounted loop-in, loop-out push fit terminal block





















Technical Data

General		Electrical	
Luminaire Wattage (W)	34W/42W/51W/60W	Rated Input Current (A)	0.2
Weight (kg)	1.75	Power Factor (pf)	0.91 to 0.9
Operating Temperature (ta °C)	45	Input Voltage Range (VAC)	220 to 24
		Inrush Current Peak (A)	20
Light Output Lumens (lm)	4700 to 8600	Surge Protection (kV)	
Efficacy (Im/W)	150	Conductor Size (mm)	0.5 to 2.
Lineacy (iii)vv)	150	Terminal Type	0 1 1
LED			
CRI	85		
Macadam Elipses	5		
Driver			
Driver Current (mA)	200 , 250 , 300 , 350		
Forward Voltage (V)	80 to 172		
Emergency			
Emergency Lumen Operating	300		
Emergency Wattage (W)	2		



xcite LED Lighting

Data Sheet



Order Code: XCBT6X1

X1 Batten - 1800mm - CCT [3000K/4000K/6000K] + Wattage Selectable

Dimensions

A (mm)	1800
B (mm)	55
C (mm)	58
Fix	610

Line Drawing

