# xcite LED Lighting
## Data Sheet

**Order Code:** XCBDE11NWM3

11W - Decorative Eyelid Design Bulkhead with Opal Diffuser - IP65 - 3hrs Maintained Emergency - 4000K



### Features

- Ideal for retrofit of existing 2D fixtures
- Suitable for exterior use, outdoor or walkways
- Photocell option available
- Choice of plain or eyelid optic
- Up to 100 lumens per watt efficacy

### Construction

- Polycarbonate body
- Opal diffuser
- Integral emergency option available
- Supplied as standard with neutral white [4000K] LED

4000K | 50,000 HOURS | 3YRS WARRANTY | IP65 | IK10 | M3

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 11 |
| Weight (kg) | 0.76 |
| Operating Temperature (ta °C) | 5 to 25 |

### Light Output

| | |
|---|---|
| Lumens (lm) | 1100 |
| Efficacy (lm/W) | 100 |

### LED

| | |
|---|---|
| CCT (K) | 4000 |
| CRI | 80 |
| Macadam Elipses | 4 |

### Emergency

| | |
|---|---|
| Emergency Lumen Operating | 211 |
| Emergency Wattage (W) | 3 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.14 |
| Power Factor (pf) | 0.9 |
| Input Voltage Range (VAC) | 220-240 |
| Inrush Current Peak (A) | 24.4 |
| Surge Protection (kV) | 0.5 |
| Conductor Size (mm) | 2.5 |
| Terminal Type | 4 pole piano key |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

# xcite LED Lighting
## Data Sheet


**Order Code:** XCBDE11NWM3

11W - Decorative Eyelid Design Bulkhead with Opal Diffuser - IP65 - 3hrs Maintained Emergency - 4000K

### Dimensions

| | |
|---|---|
| C (mm) | 60 |
| Dia. (mm) | 275 |

### Line Drawing

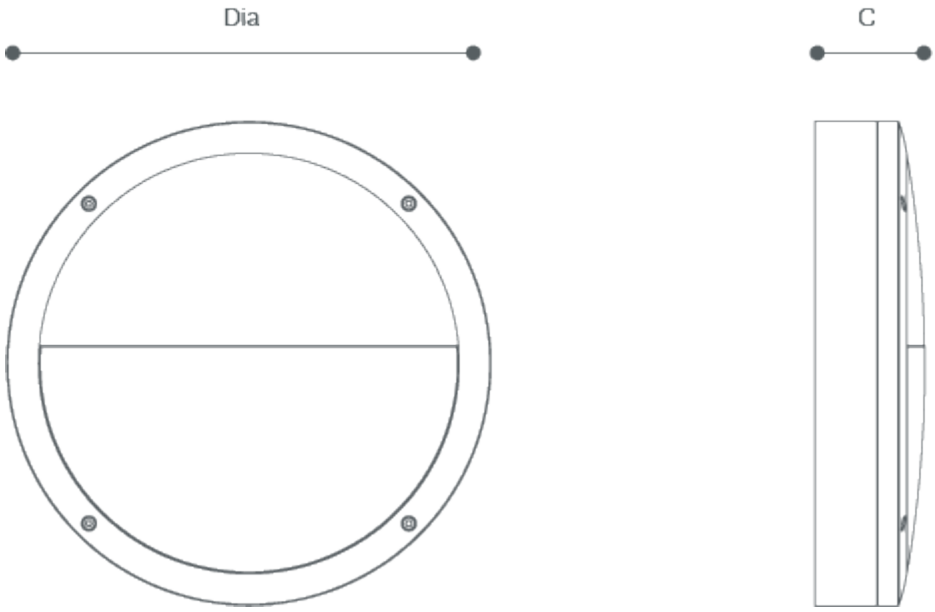


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk