


### Order Code: XCBHWPX1

X1 Bulkhead WP - Square - Prismatic diffuser - CCT [3000K/4000K/6000K] + Wattage Selectable - White

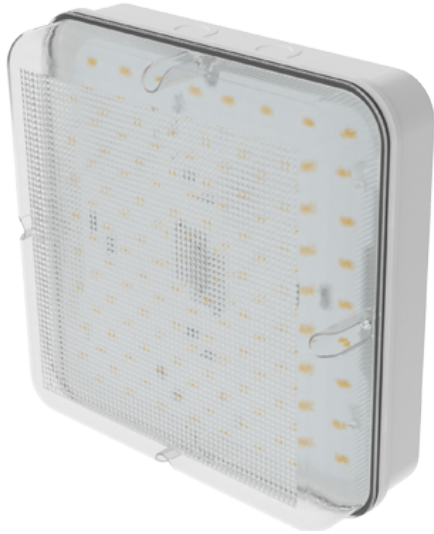

#### Features

- Suitable for exterior commercial and industrial applications
- CCT selectable via selector switch [3000K/4000K/6000K]
- Wattage selectable via selector switch [8W/12W/16W]

#### Construction

- Modular [emergency](#) and [microwave sensor](#)'s available for quick and easy conversion of a standard fitting
- For additional control, please use [X1 Bulkhead Remote](#) [Sold Separately]

#### Installation Notes

4-point screw fixing  
 Conduit side entry points for surface mount cable entry  
 Loop-in, loop-out push-fit terminal block for quick tool-free installation



#### Technical Data

| General                       |                   | Electrical                |                  |
|-------------------------------|-------------------|---------------------------|------------------|
| Luminaire Wattage (W)         | 8W/12W/16W        | Rated Input Current (A)   | 0.04 to 0.07     |
| Weight (kg)                   | 0.71              | Power Factor (pf)         | 0.82 to 0.92     |
| Operating Temperature (ta °C) | 0° to 25°         | Input Voltage Range (VAC) | 198 to 264       |
|                               |                   | Inrush Current Peak (A)   | 18.4             |
| Light Output                  |                   | Surge Protection (kV)     | 1                |
| Lumens (lm)                   | 1200 to 2000      | Conductor Size (mm)       | 0.5 to 2.5       |
| Efficacy (lm/W)               | 153               | Terminal Type             | 4 pole piano key |
| LED                           |                   |                           |                  |
| CCT (K)                       | 3000K/4000K/6000K |                           |                  |
| CRI                           | 80                |                           |                  |
| Macadam Elipses               | 0.4 to 0.8        |                           |                  |
| Driver                        |                   |                           |                  |
| Driver Current (mA)           | 140/215/280       |                           |                  |
| Forward Voltage (V)           | 48.5 to 52.5      |                           |                  |

**Order Code: XCBHWPX1**

X1 Bulkhead WP - Square - Prismatic diffuser - CCT [3000K/4000K/6000K] + Wattage Selectable - White

Dimensions

|        |     |
|--------|-----|
| A (mm) | 252 |
| B (mm) | 252 |
| C (mm) | 92  |

Line Drawing

