xcite LED Lighting
Data Sheet

Order Code: XCBOL9WW

9W - Exterior Bollard - 3000K - Anthracite Grey



Features

- Suitable for gardens, hotels, pubs and walkways
- Surface mounted via separate base plate [supplied]
- Low energy LED module for reduced running costs
- Up to 63 lumens per watt efficacy

Construction

- Die-cast aluminium body finished in Anthracite grey
- Supplied as standard with warm white [3000K] LED

Technical Data

General

Luminaire Wattage (W)	9
Weight (kg)	1.51
Operating Temperature (ta °C)	0 to 25

Light Output

Lumens (lm)	570
Efficacy (lm/W)	63

LED

CCT (K)	3000
CRI	84

Driver

Driver Current (mA)	350
Forward Voltage (V)	21

Electrical

Rated Input Current (A)	0.04
Power Factor (pf)	0.94
Input Voltage Range (VAC)	198 to 264
Inrush Current Peak (A)	13
Surge Protection (kV)	1

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Order Code: XCBOL9WW

9W - Exterior Bollard - 3000K - Anthracite Grey

Dimensions

Height (mm)	445
Dia. (mm)	102

Line Drawing

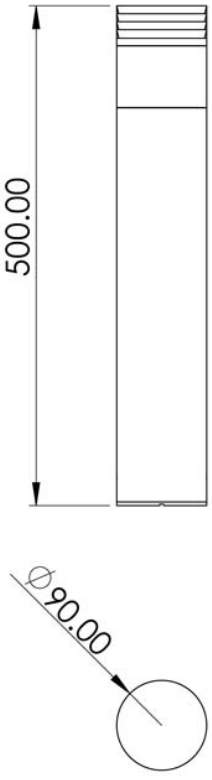

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk