


Order Code: XCBT6X1M3P

X1 Batten - 1800mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency - Batten fit PIR

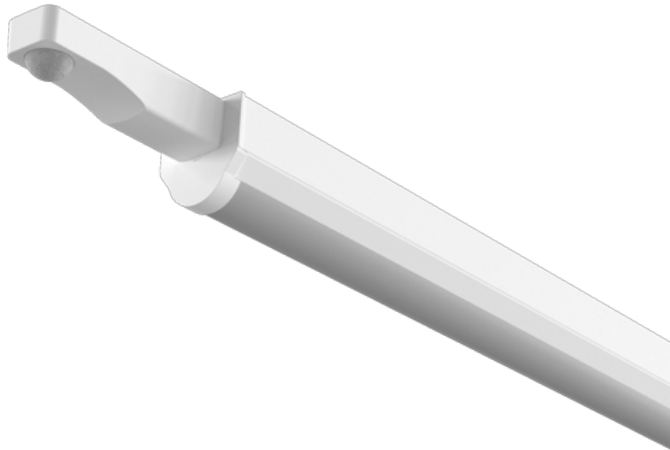

Features

- Ideal for replacement of linear fluorescent fixtures
- Suitable for general domestic and commercial use
- CCT selectable via selector switch [3000K/4000K/6000K]
- Batten fit PIR option available, compatible with [V2P Remote](#)

Construction

- Slimline steel body finished in white (RAL 9016)
- High quality opal diffuser to reduce glare
- Loop in/out mains connector
- Conduit and BESA fixing points for end or rear cable entry
- Factory presets set at:
10 minute off delay
Lux disabled

Installation Notes

Centrally-mounted loop-in, loop-out push fit terminal block



Technical Data

| General | | Electrical | |
|-------------------------------|-----------------------|---------------------------|--------------------|
| Luminaire Wattage (W) | 34W/42W/51W/60W | Rated Input Current (A) | 0.28 |
| Weight (kg) | 2.35 | Power Factor (pf) | 0.91 to 0.96 |
| Operating Temperature (ta °C) | 45 | Input Voltage Range (VAC) | 220 to 240 |
| | | Inrush Current Peak (A) | 200 |
| | | Surge Protection (kV) | L-N 1KV, LN-PG 2KV |
| | | Conductor Size (mm) | 0.5 to 2.5 |
| | | Terminal Type | 4 pole piano key |
| Light Output | | | |
| Lumens (lm) | 4700 to 8600 | | |
| Efficacy (lm/W) | 150 | | |
| LED | | | |
| CCT (K) | 3000K/4000K/6000K | | |
| CRI | 85 | | |
| Macadam Elipses | 5 | | |
| Driver | | | |
| Driver Current (mA) | 200 , 250 , 300 , 350 | | |
| Forward Voltage (V) | 80 to 172 | | |
| Emergency | | | |
| Emergency Lumen Operating | 300 | | |
| Emergency Wattage (W) | 2 | | |

Order Code: XCBT6X1M3P

X1 Batten - 1800mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Emergency - Batten fit PIR

Dimensions

| | |
|--------|------|
| A (mm) | 1921 |
| B (mm) | 55 |
| C (mm) | 58 |
| Fix | 610 |

Line Drawing

