# xcite LED Lighting
## Data Sheet

**Order Code:** XCFC150NW

150W - High Output Floodlight - 4000K



### Features

- Suitable for exterior building and feature lighting
- Supplied with stirrup and 1m of flex for column, bracket or surface fix
- High quality toughened safety glass

### Construction

- Die-cast aluminium body finished with black marine grade paint finish
- Weatherproof IP65 construction
- Breather gland for reducing condensation
- Supplied as standard with neutral white [4000K] LED

4000K | 50,000 HOURS | 5YRS WARRANTY | ONSITE 1 YR WARRANTY | IP65 | IK08

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 150 |
| Weight (kg) | 2.38 |
| Operating Temperature (ta °C) | -20 to 25 |

### Light Output

| | |
|---|---|
| Lumens (lm) | 16000 |
| Efficacy (lm/W) | 107 |

### LED

| | |
|---|---|
| CCT (K) | 4000 |
| CRI | >80 |
| Macadam Elipses | 4 |

### Driver

| | |
|---|---|
| Driver Current (mA) | 520 |
| Forward Voltage (V) | 230 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.73 |
| Power Factor (pf) | 0.9 |
| Input Voltage Range (VAC) | 220-240 |
| Terminal Type | 3-CORE FLEX |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

# xcite LED Lighting

## Data Sheet


**Order Code:** XCFC150NW

150W - High Output Floodlight - 4000K

### Dimensions

| | |
|---|---|
| Length (mm) | 385 |
| Height (mm) | 280 |
| Depth (mm) | 40 |

### Line Drawing

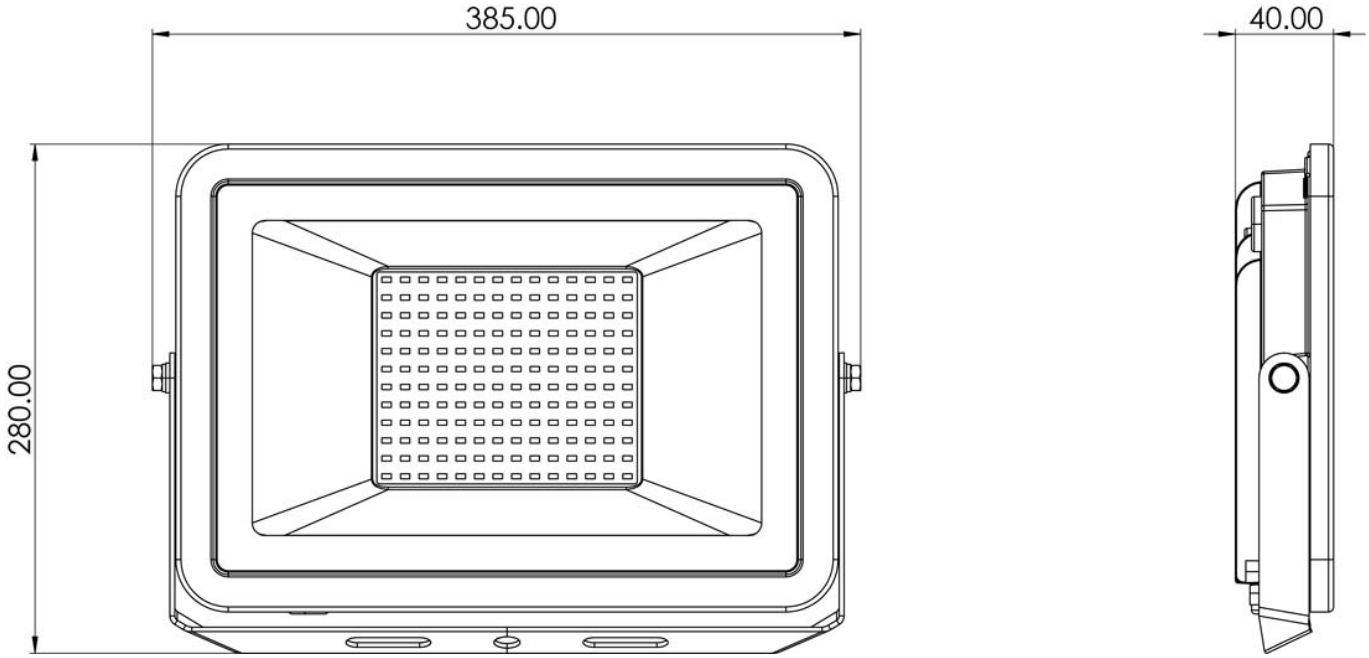


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk