
## xcite LED Lighting

### **Data Sheet**



**Order Code: XCFRRPC** 

GU10 - Fire Rated Recessed Ring Downlight - Lampholder - Polished Chrome

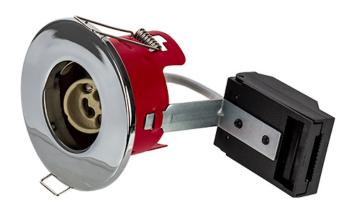

#### **Features**

- Ideal for retrofit of existing halogen downlight fixtures
- Available in 3 different coloured bezels
- Lamps sold separately
- FIXED, Tilt and IP65 Shower version available
- 30, 60 & 90 minute fire rating with solid timber joists
- 30 minute fire rating with Staircraft I-Joist [Compatibility Matrix]

### Construction

- Steel body providing a high level of fire protection in accordance with Building Regulations Part B
- Supplied with GU10 lampholder and bracket

















### **Technical Data**

General		Electrical	
Luminaire Wattage (W)	50	Input Voltage Range (VAC)	230
Weight (kg)	1.72		



# xcite LED Lighting

# Data Sheet



### **Order Code: XCFRRPC**

GU10 - Fire Rated Recessed Ring Downlight - Lampholder - Polished Chrome

### **Dimensions**

C (mm)	94
Cut Out (mm)	68
Dia. (mm)	85

### Line Drawing

